

5MM LED - ABSTANDSHALTER



Technische Beschreibung

Material: PA 6.6


Entflammbarkeit: V2 (UL94)

Temperaturbereich: -35° ~ +85°C

Farbe: Natur

Auf Anfrage auch in Material PA 6.6 UL94V0 lieferbar

Alle Maße in mm

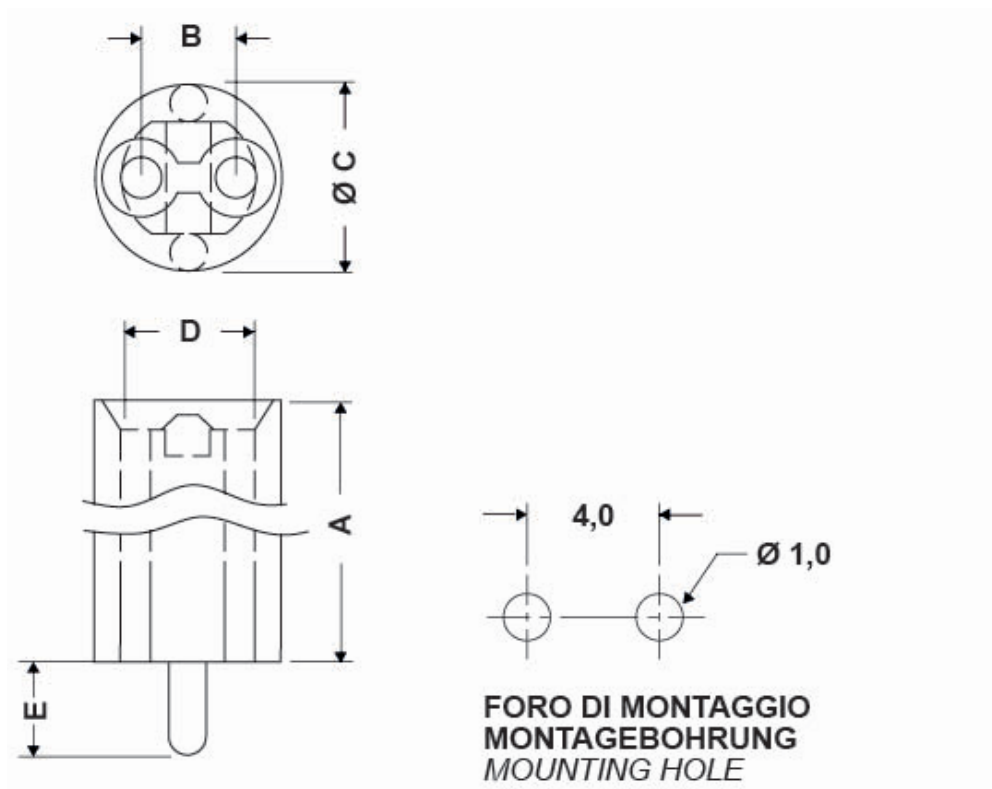

Artikel	A	B	C	D	E	Anmerkungen	VPE-Stckz.
10595AA00	2,0	2,5	Ø 5,0	Ø 3,6	2,5	per / for 5,0 mm LED	2.000
10596AA00	3,0	2,5	Ø 5,0	Ø 3,6	2,5	per / for 5,0 mm LED	2.000
10597AA00	4,0	2,5	Ø 5,0	Ø 3,6	2,5	per / for 5,0 mm LED	2.000
10598AA00	6,0	2,5	Ø 5,0	Ø 3,6	2,5	per / for 5,0 mm LED	2.000
10599AA00	7,0	2,5	Ø 5,0	Ø 3,6	2,5	per / for 5,0 mm LED	2.000
10600AA00	8,0	2,5	Ø 5,0	Ø 3,6	2,5	per / for 5,0 mm LED	2.000
10601AA00	9,0	2,5	Ø 5,0	Ø 3,6	2,5	per / for 5,0 mm LED	2.000
10602AA00	10,0	2,5	Ø 5,0	Ø 3,6	2,5	per / for 5,0 mm LED	2.000
10603AA00	11,0	2,5	Ø 5,0	Ø 3,6	2,5	per / for 5,0 mm LED	1.000
10604AA00	11,5	2,5	Ø 5,0	Ø 3,6	2,5	per / for 5,0 mm LED	1.000
10605AA00	12,0	2,5	Ø 5,0	Ø 3,6	2,5	per / for 5,0 mm LED	1.000
10606AA00	12,5	2,5	Ø 5,0	Ø 3,6	2,5	per / for 5,0 mm LED	1.000
10607AA00	13,0	2,5	Ø 5,0	Ø 3,6	2,5	per / for 5,0 mm LED	1.000
10608AA00	14,0	2,5	Ø 5,0	Ø 3,6	2,5	per / for 5,0 mm LED	1.000
10609AA00	18,0	2,5	Ø 5,0	Ø 3,6	2,5	per / for 5,0 mm LED	1.000