

5MM LED - ABSTANDSHALTER



Technische Beschreibung

Material: PA 6.6


Entflammbarkeit: V2 (UL94)

Temperaturbereich: -35° ~ +85°C

Farbe: Natur

Auf Anfrage auch in Material PA 6.6 UL94V0 lieferbar

Alle Maße in mm

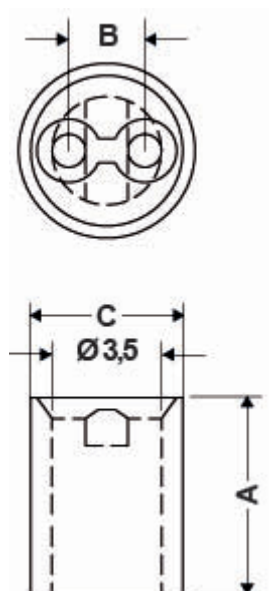

Artikel	A	B	C	VPE-Stckz.
6586AA00	1,5	2,5	Ø 5,0	2.000
6587AA00	2,0	2,5	Ø 5,0	2.000
6588AA00	2,5	2,5	Ø 5,0	2.000

Artikel	A	B	C	VPE-Stckz.
6589AA00	3,0	2,5	Ø 5,0	2.000
6590AA00	3,5	2,5	Ø 5,0	2.000
6352AA00	4,0	2,5	Ø 5,0	2.000
6591AA00	4,5	2,5	Ø 5,0	2.000
6592AA00	5,0	2,5	Ø 5,0	2.000
6593AA00	5,5	2,5	Ø 5,0	2.000
6594AA00	6,0	2,5	Ø 5,0	2.000
6175AA00	6,5	2,5	Ø 5,0	2.000
6595AA00	7,0	2,5	Ø 5,0	2.000
6596AA00	7,5	2,5	Ø 5,0	2.000
6597AA00	8,0	2,5	Ø 5,0	2.000
6598AA00	8,5	2,5	Ø 5,0	2.000
6599AA00	9,0	2,5	Ø 5,0	2.000
6176AA00	9,5	2,5	Ø 5,0	2.000
6601AA00	10,0	2,5	Ø 5,0	2.000
6602AA00	10,5	2,5	Ø 5,0	2.000
6603AA00	11,0	2,5	Ø 5,0	2.000
6604AA00	11,5	2,5	Ø 5,0	2.000
6605AA00	12,0	2,5	Ø 5,0	2.000
6177AA00	12,5	2,5	Ø 5,0	2.000
6606AA00	13,0	2,5	Ø 5,0	2.000
6607AA00	13,5	2,5	Ø 5,0	2.000
6608AA00	14,0	2,5	Ø 5,0	1.000
6609AA00	14,5	2,5	Ø 5,0	1.000
6610AA00	15,0	2,5	Ø 5,0	1.000
6611AA00	15,5	2,5	Ø 5,0	1.000
6178AA00	16,0	2,5	Ø 5,0	1.000
6612AA00	16,5	2,5	Ø 5,0	1.000
6613AA00	17,0	2,5	Ø 5,0	1.000
6614AA00	17,5	2,5	Ø 5,0	1.000
6615AA00	18,0	2,5	Ø 5,0	1.000

Artikel	A	B	C	VPE-Stckz.
6616AA00	18,5	2,5	Ø 5,0	1.000
6617AA00	19,0	2,5	Ø 5,0	1.000
6617AA00	19,5	2,5	Ø 5,0	1.000
6618AA00	20,0	2,5	Ø 5,0	1.000
6619AA00	20,5	2,5	Ø 5,0	1.000
6620AA00	21,0	2,5	Ø 5,0	1.000
6621AA00	21,5	2,5	Ø 5,0	1.000
6622AA00	22,0	2,5	Ø 5,0	1.000
6623AA00	22,5	2,5	Ø 5,0	1.000
6624AA00	23,0	2,5	Ø 5,0	1.000
6625AA00	23,5	2,5	Ø 5,0	1.000
6626AA00	24,0	2,5	Ø 5,0	1.000