

ABSTANDHALTER MIT AUSSEN/AUSSENGEWINDE M4 / SW 6,0



Technische Beschreibung


Material: PA 6.6

Farbe: schwarz

Entflammbarkeit: HB (UL 94)

Temperaturbereich: -30°C bis +150°C

Alle Maße sind in mm

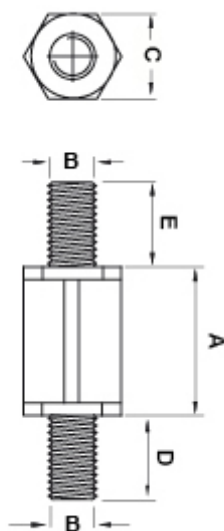

Artikel	A	B	C	D	E	VPE-Stckz.
8167AA0103.0	3,0	M4	6,0	6,4	6,4	500
8167AA0104.0	4,0	M4	6,0	6,4	6,4	500
8167AA0105.0	5,0	M4	6,0	6,4	6,4	500
8167AA0106.0	6,0	M4	6,0	6,4	6,4	500

Artikel	A	B	C	D	E	VPE-Stckz.
8167AA0107.0	7,0	M4	6,0	6,4	6,4	500
8167AA0108.0	8,0	M4	6,0	6,4	6,4	500
8167AA0109.0	9,0	M4	6,0	6,4	6,4	500
8167AA0110.0	10,0	M4	6,0	6,4	6,4	500
8167AA0111.0	11,0	M4	6,0	6,4	6,4	500
8167AA0112.0	12,0	M4	6,0	6,4	6,4	500
8167AA0113.0	13,0	M4	6,0	6,4	6,4	500
8167AA0114.0	14,0	M4	6,0	6,4	6,4	500
8167AA0115.0	15,0	M4	6,0	6,4	6,4	500
8167AA0116.0	16,0	M4	6,0	6,4	6,4	500
8167AA0117.0	17,0	M4	6,0	6,4	6,4	500
8167AA0118.0	18,0	M4	6,0	6,4	6,4	500
8167AA0119.0	19,0	M4	6,0	6,4	6,4	500
8167AA0120.0	20,0	M4	6,0	6,4	6,4	500
8167AA0121.0	21,0	M4	6,0	6,4	6,4	500
8167AA0122.0	22,0	M4	6,0	6,4	6,4	500
8167AA0123.0	23,0	M4	6,0	6,4	6,4	500
8167AA0124.0	24,0	M4	6,0	6,4	6,4	500
8167AA0125.0	25,0	M4	6,0	6,4	6,4	500
8167AA0126.0	26,0	M4	6,0	6,4	6,4	500
8167AA0127.0	27,0	M4	6,0	6,4	6,4	500
8167AA0128.0	28,0	M4	6,0	6,4	6,4	500
8167AA0129.0	29,0	M4	6,0	6,4	6,4	500
8167AA0130.0	30,0	M4	6,0	6,4	6,4	500
8167AA0131.0	31,0	M4	6,0	6,4	6,4	500
8167AA0132.0	32,0	M4	6,0	6,4	6,4	500
8167AA0133.0	33,0	M4	6,0	6,4	6,4	500
8167AA0134.0	34,0	M4	6,0	6,4	6,4	500
8167AA0135.0	35,0	M4	6,0	6,4	6,4	500
8167AA0136.0	36,0	M4	6,0	6,4	6,4	500
8167AA0137.0	37,0	M4	6,0	6,4	6,4	500

Artikel	A	B	C	D	E	VPE-Stckz.
8167AA0138.0	38,0	M4	6,0	6,4	6,4	500
8167AA0139.0	39,0	M4	6,0	6,4	6,4	500
8167AA0140.0	40,0	M4	6,0	6,4	6,4	500
8167AA0141.0	41,0	M4	6,0	6,4	6,4	500
8167AA0142.0	42,0	M4	6,0	6,4	6,4	500
8167AA0143.0	43,0	M4	6,0	6,4	6,4	500
8167AA0144.0	44,0	M4	6,0	6,4	6,4	500
8167AA0145.0	45,0	M4	6,0	6,4	6,4	500
8167AA0146.0	46,0	M4	6,0	6,4	6,4	500
8167AA0147.0	47,0	M4	6,0	6,4	6,4	500
8167AA0148.0	48,0	M4	6,0	6,4	6,4	500
8167AA0149.0	49,0	M4	6,0	6,4	6,4	500
8167AA0150.0	50,0	M4	6,0	6,4	6,4	500
8167AA0151.0	51,0	M4	6,0	6,4	6,4	500
8167AA0152.0	52,0	M4	6,0	6,4	6,4	500
8167AA0153.0	53,0	M4	6,0	6,4	6,4	500
8167AA0154.0	54,0	M4	6,0	6,4	6,4	500
8167AA0155.0	55,0	M4	6,0	6,4	6,4	500
8167AA0156.0	56,0	M4	6,0	6,4	6,4	500
8167AA0157.0	57,0	M4	6,0	6,4	6,4	500
8167AA0158.0	58,0	M4	6,0	6,4	6,4	500
8167AA0159.0	59,0	M4	6,0	6,4	6,4	500
8167AA0160.0	60,0	M4	6,0	6,4	6,4	500
8167AA0161.0	61,0	M4	6,0	6,4	6,4	500
8167AA0162.0	62,0	M4	6,0	6,4	6,4	500
8167AA0163.0	63,0	M4	6,0	6,4	6,4	500
8167AA0164.0	64,0	M4	6,0	6,4	6,4	500
8167AA0165.0	65,0	M4	6,0	6,4	6,4	500