


ABSTANDHALTER MIT INNENGEWINDE UND STECKBEFESTIGUNG

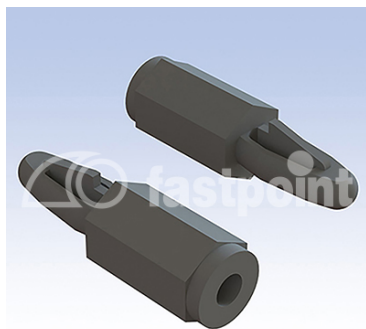

Technische Beschreibung


Material: PA 6.6

Farbe: schwarz

Entflammbarkeit: HB (UL 94)

Temperaturbereich: -35°C bis +130°C

Alle Maße sind in mm

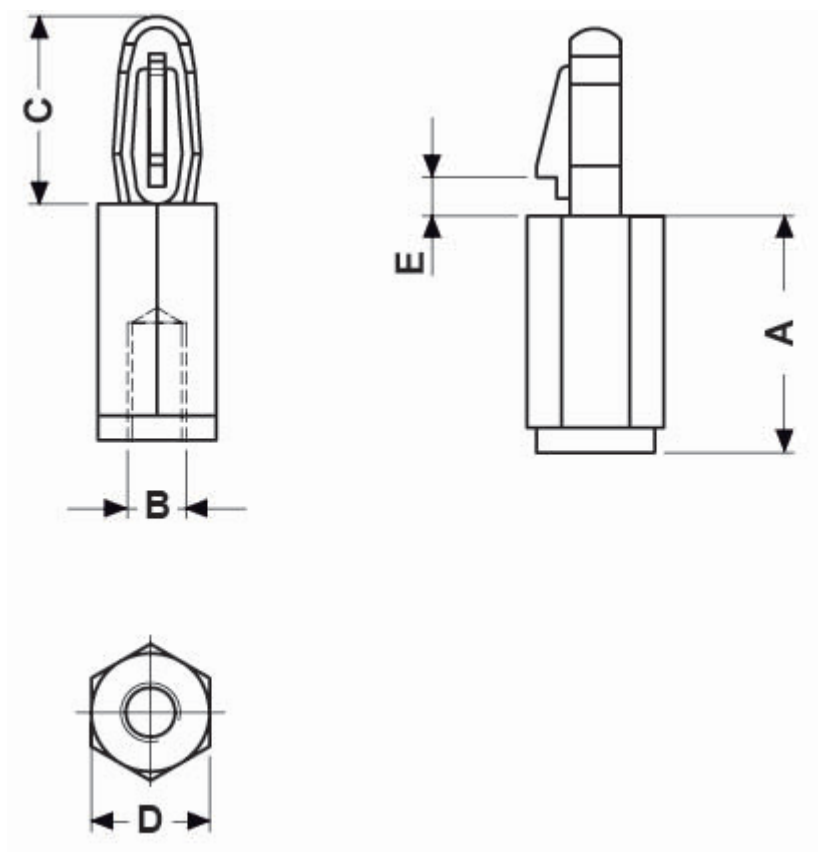

Artikel	A	B	C	D	E	Bohrung	Stärke	VPE-Stckz.
5949AA0105.0	5,0	M3	3,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0106.0	6,0	M3	4,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0107.0	7,0	M3	5,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0108.0	8,0	M3	6,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0109.0	9,0	M3	7,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0110.0	10,0	M3	8,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0111.0	11,0	M3	9,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0112.0	12,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0113.0	13,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0114.0	14,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0115.0	15,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0116.0	16,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0117.0	17,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0118.0	18,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0119.0	19,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0120.0	20,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0121.0	21,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0122.0	22,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0123.0	23,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0124.0	24,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0125.0	25,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0126.0	26,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0127.0	27,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0128.0	28,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0129.0	29,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0130.0	30,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0131.0	31,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0132.0	32,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0133.0	33,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0134.0	34,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000

Artikel	A	B	C	D	E	Bohrung	Stärke	VPE-Stckz.
5949AA0135.0	35,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0136.0	36,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0137.0	37,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0138.0	38,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0139.0	39,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0140.0	40,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0141.0	41,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0142.0	42,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0143.0	43,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0144.0	44,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0145.0	45,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0146.0	46,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0147.0	47,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0148.0	48,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0149.0	49,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0150.0	50,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0151.0	51,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0152.0	52,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0153.0	53,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0154.0	54,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0155.0	55,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0156.0	56,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0157.0	57,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0158.0	58,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0159.0	59,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0160.0	60,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000
5949AA0161.0	61,0	M3	10,0	6,0	2,1	Ø 4,0	2,1	1.000