



ABSTANDSBOLZEN I/I MESSING VERNICKELT M2.5

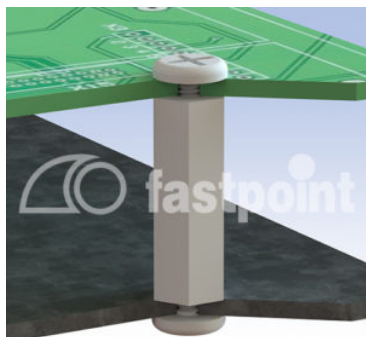

Technische Beschreibung

Material: Messing 2.0401 **Oberfläche:** vernickelt G3E **Hinweis „T“:** durchgehendes Gewinde **Zwischenlängen und Sonderausführungen:** Auf Anfrage Alle Maße sind in mm

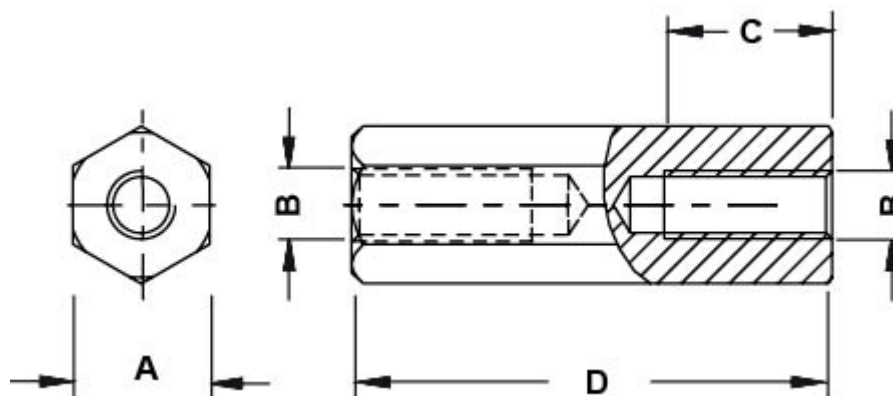

Artikel	A	B	C	D	VPE-Stckz.
10830MA9205.0	SW 4.0	M2,5	T	5,0	100
10830MA9206.0	SW 4.0	M2,5	T	6,0	100
10830MA9208.0	SW 4.0	M2,5	T	8,0	100
10830MA9210.0	SW 4.0	M2,5	T	10,0	100
10830MA9212.0	SW 4.0	M2,5	T	12,0	100
10830MA9213.0	SW 4.0	M2,5	T	13,0	100
10830MA9215.0	SW 4.0	M2,5	T	15,0	100
10830MA9218.0	SW 4.0	M2,5	6,0	18,0	100
10830MA9220.0	SW 4.0	M2,5	6,0	20,0	100
10830MA9222.0	SW 4.0	M2,5	6,0	22,0	100
10830MA9225.0	SW 4.0	M2,5	6,0	25,0	100
10830MA9230.0	SW 4.0	M2,5	6,0	30,0	100

Artikel	A	B	C	D	VPE-Stckz.
10830MA9235.0	SW 4.0	M2,5	6,0	35,0	100
10830MA9240.0	SW 4.0	M2,5	6,0	40,0	100
10831MA9205.0	SW 5.0	M2,5	T	5,0	100
10831MA9206.0	SW 5.0	M2,5	T	6,0	100
10831MA9207.0	SW 5.0	M2,5	T	7,0	100
10831MA9208.0	SW 5.0	M2,5	T	8,0	100
10831MA9209.0	SW 5.0	M2,5	T	9,0	100
10831MA9210.0	SW 5.0	M2,5	T	10,0	100
10831MA9211.0	SW 5.0	M2,5	T	11,0	100
10831MA9212.0	SW 5.0	M2,5	T	12,0	100
10831MA9213.0	SW 5.0	M2,5	T	13,0	100
10831MA9214.0	SW 5.0	M2,5	T	14,0	100
10831MA9215.0	SW 5.0	M2,5	T	15,0	100
10831MA9216.0	SW 5.0	M2,5	8,0	16,0	100
10831MA9217.0	SW 5.0	M2,5	8,0	17,0	100
10831MA9218.0	SW 5.0	M2,5	8,0	18,0	100
10831MA9219.0	SW 5.0	M2,5	8,0	19,0	100
10831MA9220.0	SW 5.0	M2,5	8,0	20,0	100
10831MA9221.0	SW 5.0	M2,5	10,0	21,0	100
10831MA9222.0	SW 5.0	M2,5	10,0	22,0	100
10831MA9223.0	SW 5.0	M2,5	10,0	23,0	100
10831MA9224.0	SW 5.0	M2,5	10,0	24,0	100
10831MA9225.0	SW 5.0	M2,5	10,0	25,0	100
10831MA9226.0	SW 5.0	M2,5	10,0	26,0	100
10831MA9227.0	SW 5.0	M2,5	10,0	27,0	100
10831MA9228.0	SW 5.0	M2,5	10,0	28,0	100
10831MA9229.0	SW 5.0	M2,5	10,0	29,0	100
10831MA9230.0	SW 5.0	M2,5	10,0	30,0	100