


# ABSTANDSBOLZEN MIT INNEN/AUSSENGEWINDE M4 UL94V2

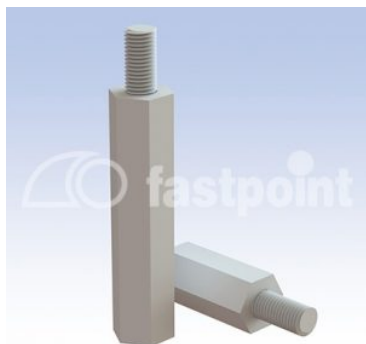

## Technische Beschreibung

**Material:** PA 6.6


**Entflammbarkeit:** V2 (UL 94)

**Temperaturbereich:** -35° ~ +85°C

**Farbe:** Natur

Auf Anfrage auch in Material PA 6.6 UL94Vo lieferbar

Alle Maße in mm

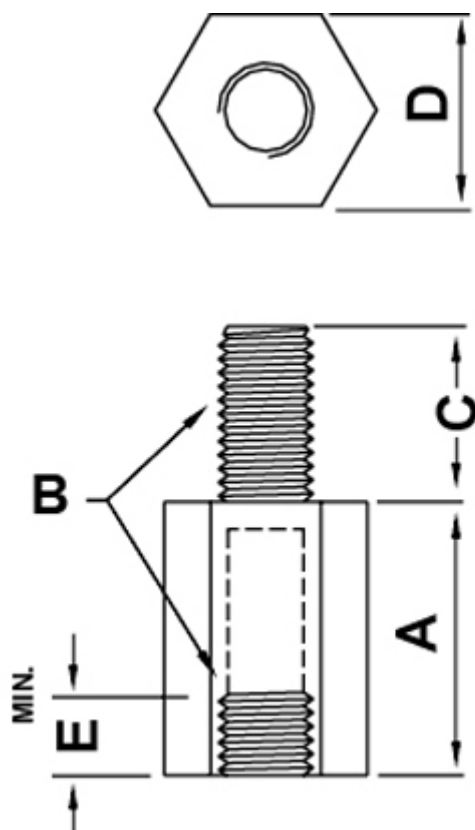

| Artikel  | A    | B      | C   | D   | E   | VPE-Stckz. |
|----------|------|--------|-----|-----|-----|------------|
| 6259AA00 | 6,0  | M4x0,7 | 7,0 | 7,0 | 4,0 | 1.000      |
| 6260AA00 | 8,0  | M4x0,7 | 7,0 | 7,0 | 6,0 | 1.000      |
| 6261AA00 | 10,0 | M4x0,7 | 7,0 | 7,0 | 6,0 | 1.000      |
| 6262AA00 | 12,0 | M4x0,7 | 7,0 | 7,0 | 6,0 | 1.000      |
| 6263AA00 | 14,0 | M4x0,7 | 7,0 | 7,0 | 6,0 | 1.000      |
| 6264AA00 | 16,0 | M4x0,7 | 7,0 | 7,0 | 7,0 | 1.000      |
| 6265AA00 | 20,0 | M4x0,7 | 7,0 | 7,0 | 8,0 | 1.000      |
| 6266AA00 | 25,0 | M4x0,7 | 7,0 | 7,0 | 8,0 | 1.000      |
| 6267AA00 | 30,0 | M4x0,7 | 7,0 | 7,0 | 8,0 | 1.000      |
| 6268AA00 | 35,0 | M4x0,7 | 7,0 | 7,0 | 8,0 | 1.000      |
| 6269AA00 | 40,0 | M4x0,7 | 7,0 | 7,0 | 8,0 | 1.000      |
| 6270AA00 | 45,5 | M4x0,7 | 7,0 | 7,0 | 8,0 | 1.000      |