


# ABSTANDSBOLZEN MIT INNEN / AUSSENGEWINDE M3 UL94V2

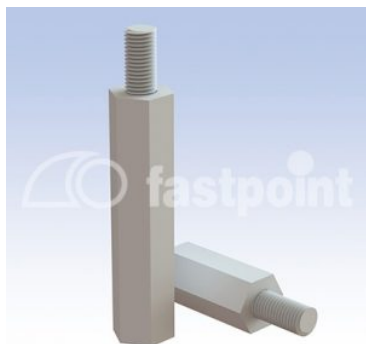

## Technische Beschreibung

**Material:** PA 6.6


**Entflammbarkeit:** V2 (UL 94)

**Temperaturbereich:** -35° ~ +85°C

**Farbe:** Natur

Auf Anfrage auch in Material PA 6.6 UL94V0 lieferbar

Alle Maße in mm

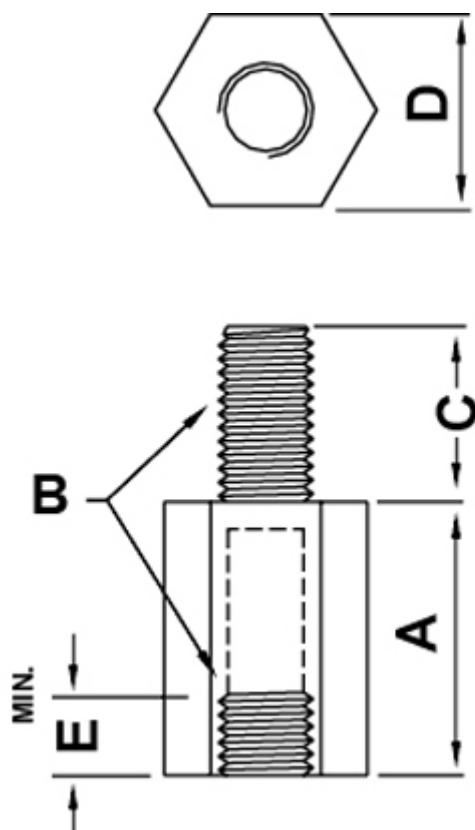

| Artikel   | A     | B      | C   | D   | E   | VPE-Stckz. |
|-----------|-------|--------|-----|-----|-----|------------|
| 12277AA00 | 4,0   | M3x0,5 | 6,0 | 5,5 | 3,0 | 1.000      |
| 5691AA00  | 5,0   | M3x0,5 | 6,0 | 5,5 | 3,0 | 1.000      |
| 5692AA00  | 6,0   | M3x0,5 | 6,0 | 5,5 | 4,0 | 1.000      |
| 5693AA00  | 7,0   | M3x0,5 | 6,0 | 5,5 | 5,0 | 1.000      |
| 12278AA00 | 7,5   | M3x0,5 | 6,0 | 5,5 | 5,0 | 1.000      |
| 5694AA00  | 8,0   | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 12279AA00 | 8,5   | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5695AA00  | 9,0   | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5696AA00  | 10,0  | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5697AA00  | 10,5  | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5698AA00  | 11,0  | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5700AA00  | 12,0  | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5699AA00  | 12,7  | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5701AA00  | 13,0  | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5702AA00  | 14,0  | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5703AA00  | 15,0  | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 12280AA00 | 15,5  | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5704AA00  | 16,0  | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5705AA00  | 165,0 | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5706AA00  | 17,0  | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5707AA00  | 18,0  | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5708AA00  | 18,5  | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5709AA00  | 19,0  | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5710AA00  | 20,0  | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5711AA00  | 21,0  | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5712AA00  | 22,0  | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5713AA00  | 24,5  | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5714AA00  | 25,0  | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5715AA00  | 27,0  | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 12281AA00 | 28,0  | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |

| Artikel   | A    | B      | C   | D   | E   | VPE-Stckz. |
|-----------|------|--------|-----|-----|-----|------------|
| 12282AA00 | 28,5 | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5716AA00  | 30,0 | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5717AA00  | 33,0 | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 12283AA00 | 34,5 | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 5718AA00  | 35,0 | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 12284AA00 | 36,0 | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 12285AA00 | 40,0 | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |
| 12286AA00 | 45,0 | M3x0,5 | 6,0 | 5,5 | 6,0 | 1.000      |