

ABSTANDSHALTER INNENGEWINDE M3 UND VERDREHSCHUTZ



Technische Beschreibung

Material: PA 6.6


Entflammbarkeit: V2 (UL 94)

Temperaturbereich: -35° ~ +85°C

Farbe: Natur

Auf Anfrage auch in Material PA 6.6 UL94V0 lieferbar

Alle Maße in mm

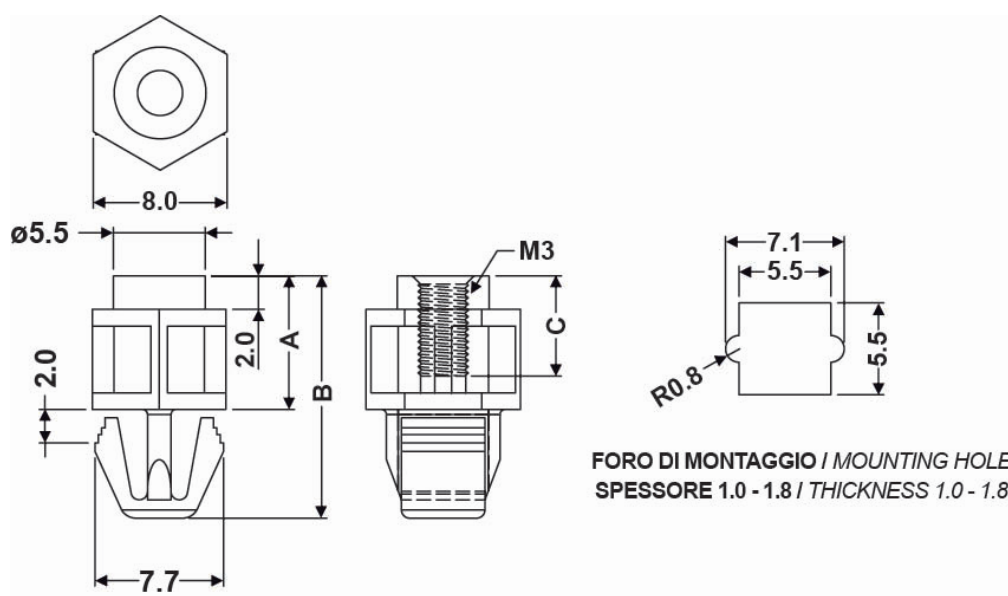

Artikel	A	B	C	D	E	F	Stärke	VPE-Stckz.
8357AA00	5,0	11,5	3,0	8,0	5,5	2,0	1,0 - 1,8	1.000
8358AA00	6,0	12,5	4,0	8,0	5,5	2,0	1,0 - 1,8	1.000

Artikel	A	B	C	D	E	F	Stärke	VPE-Stckz.
8359AA00	6,4	12,9	4,4	8,0	5,5	2,0	1,0 - 1,8	1.000
8360AA00	8,0	14,5	6,0	8,0	5,5	2,0	1,0 - 1,8	1.000
8361AA00	9,5	16,0	8,0	8,0	5,5	2,0	1,0 - 1,8	1.000
8362AA00	10,0	16,5	8,0	8,0	5,5	2,0	1,0 - 1,8	1.000
8363AA00	12,0	18,5	8,0	8,0	5,5	2,0	1,0 - 1,8	1.000
8364AA00	12,7	19,2	8,0	8,0	5,5	2,0	1,0 - 1,8	1.000
8365AA00	15,9	22,4	8,0	8,0	5,5	2,0	1,0 - 1,8	1.000
8366AA00	18,0	24,5	8,0	8,0	5,5	2,0	1,0 - 1,8	1.000
8367AA00	20,0	26,5	8,0	8,0	5,5	2,0	1,0 - 1,8	1.000
8368AA00	22,0	28,5	8,0	8,0	5,5	2,0	1,0 - 1,8	1.000
8369AA00	25,4	31,9	8,0	8,0	5,5	2,0	1,0 - 1,8	1.000