



ABSTANDSHALTER MIT STECKFUSS UND INNENGEWINDE FÜR BOHRUNG Ø 3,0

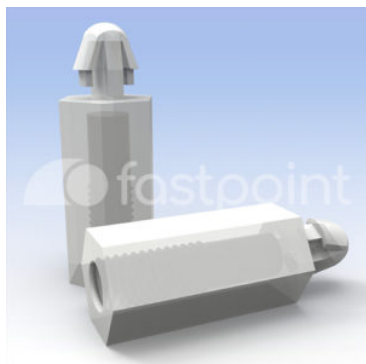

Technische Beschreibung

Material: PA 6.6 **Farbe:** Natur **Entflammbarkeit:** V2 (UL94) **Temperaturbereich:** -35°C ~ +85°C Alle Maße sind in mm

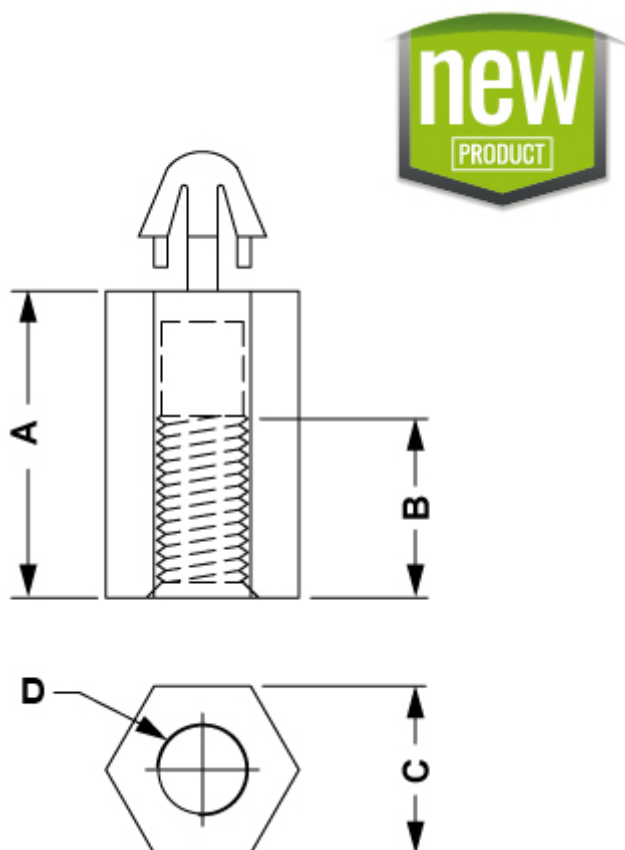

Artikel	A	B	C	D	Bohrung	Stärke	VPE-Stckz.
12652AA0005.0	5,0	3,0	5,5	M3 x 0,5P	Ø 3,0	1,6	2.000
12652AA0006.0	6,0	4,0	5,5	M3 x 0,5P	Ø 3,0	1,6	2.000
12652AA0007.0	7,0	4,0	5,5	M3 x 0,5P	Ø 3,0	1,6	2.000

Artikel	A	B	C	D	Bohrung	Stärke	VPE-Stckz.
12652AA0008.0	8,0	6,0	5,5	M3 x 0,5P	Ø 3,0	1,6	2.000
12652AA0009.0	9,0	6,0	5,5	M3 x 0,5P	Ø 3,0	1,6	2.000
12652AA0010.0	10,0	6,0	5,5	M3 x 0,5P	Ø 3,0	1,6	2.000
12652AA0011.0	11,0	6,0	5,5	M3 x 0,5P	Ø 3,0	1,6	1.000
12652AA0012.0	12,0	6,0	5,5	M3 x 0,5P	Ø 3,0	1,6	1.000
12652AA0013.0	13,0	6,0	5,5	M3 x 0,5P	Ø 3,0	1,6	1.000
12652AA0014.0	14,0	6,0	5,5	M3 x 0,5P	Ø 3,0	1,6	1.000
12652AA0015.0	15,0	6,0	5,5	M3 x 0,5P	Ø 3,0	1,6	1.000
12652AA0016.0	16,0	6,0	5,5	M3 x 0,5P	Ø 3,0	1,6	1.000
12652AA0017.0	17,0	6,0	5,5	M3 x 0,5P	Ø 3,0	1,6	1.000
12652AA0018.0	18,0	6,0	5,5	M3 x 0,5P	Ø 3,0	1,6	1.000
12652AA0019.0	19,0	6,0	5,5	M3 x 0,5P	Ø 3,0	1,6	1.000
12652AA0020.0	20,0	6,0	5,5	M3 x 0,5P	Ø 3,0	1,6	1.000
12652AA0022.0	22,0	6,0	5,5	M3 x 0,5P	Ø 3,0	1,6	1.000
12652AA0023.5	23,5	6,0	5,5	M3 x 0,5P	Ø 3,0	1,6	1.000
12652AA0026.0	26,0	6,0	5,5	M3 x 0,5P	Ø 3,0	1,6	1.000
12652AA0027.0	27,0	6,0	5,5	M3 x 0,5P	Ø 3,0	1,6	1.000