

ABSTANDSROLLE ABGESETZT



Technische Beschreibung


Material: PA 6, 25%GV

Entflammbarkeit: HB (UL94)

Temperaturbereich: -35°C ~ +110°C

Farbe: Schwarz

*Alle Maße in mm

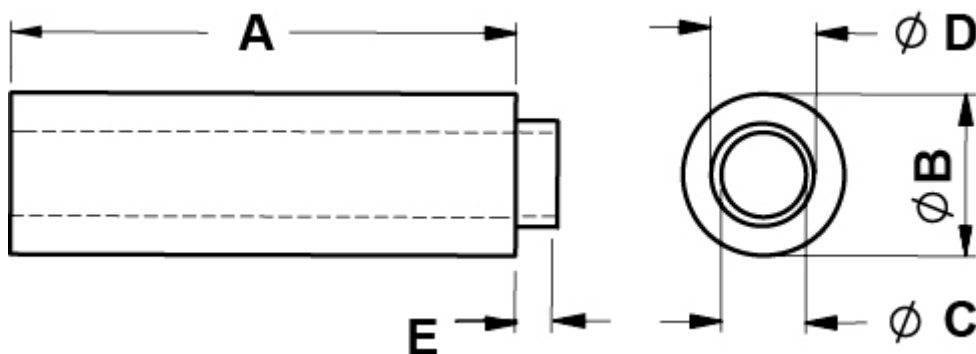

Artikel	A	B	C	D	E	VPE-Stckz.
10070BB0103.0	3,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0104.0	4,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0105.0	5,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0106.0	6,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0107.0	7,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0108.0	8,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0109.0	9,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0110.0	10,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500

Artikel	A	B	C	D	E	VPE-Stckz.
10070BB0111.0	11,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0112.0	12,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0113.0	13,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0114.0	14,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0115.0	15,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0116.0	16,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0117.0	17,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0118.0	18,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0119.0	19,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0120.0	20,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0121.0	21,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0122.0	22,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0123.0	23,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0124.0	24,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0125.0	25,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0126.0	26,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0127.0	27,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0128.0	28,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0129.0	29,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0130.0	30,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0131.0	31,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0132.0	32,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0133.0	33,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0134.0	34,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0135.0	35,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0136.0	36,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0137.0	37,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0138.0	38,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0139.0	39,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0140.0	40,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0141.0	41,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500

Artikel	A	B	C	D	E	VPE-Stckz.
10070BB0142.0	42,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0143.0	43,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0144.0	44,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0145.0	45,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0146.0	46,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0147.0	47,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0148.0	48,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0149.0	49,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500
10070BB0150.0	50,0	Ø 6,0	Ø 4,2	Ø 5,0	1,5	500