

# ABSTANDSROLLE ABGESETZT



## Technische Beschreibung


**Material:** PA 6, 25%GV

**Entflammbarkeit:** HB (UL94)

**Temperaturbereich:** -35°C ~ +110°C

**Farbe:** Schwarz

\*Alle Maße in mm

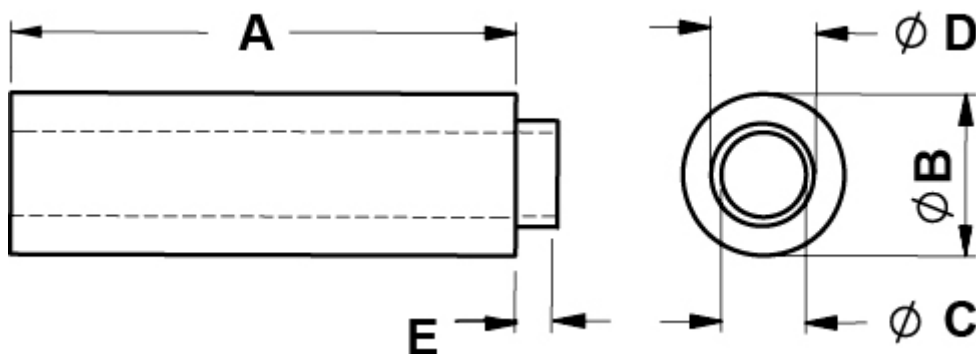

| Artikel       | A    | B     | C     | D     | E   | VPE-Stckz. |
|---------------|------|-------|-------|-------|-----|------------|
| 10066BB0037.0 | 37,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0103.0 | 3,0  | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0104.0 | 4,0  | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0105.0 | 5,0  | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0106.0 | 6,0  | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0107.0 | 7,0  | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0108.0 | 8,0  | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0109.0 | 9,0  | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |

| Artikel       | A    | B     | C     | D     | E   | VPE-Stckz. |
|---------------|------|-------|-------|-------|-----|------------|
| 10066BB0110.0 | 10,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0111.0 | 11,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0112.0 | 12,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0113.0 | 13,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0114.0 | 14,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0115.0 | 15,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0116.0 | 16,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0117.0 | 17,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0118.0 | 18,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0119.0 | 19,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0120.0 | 20,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0121.0 | 21,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0122.0 | 22,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0123.0 | 23,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0124.0 | 24,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0125.0 | 25,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0126.0 | 26,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0127.0 | 27,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0128.0 | 28,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0129.0 | 29,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0130.0 | 30,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0131.0 | 31,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0132.0 | 32,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0133.0 | 33,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0134.0 | 34,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0135.0 | 35,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0136.0 | 36,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0137.0 | 37,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0138.0 | 38,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0139.0 | 39,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0140.0 | 40,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |

| Artikel       | A    | B     | C     | D     | E   | VPE-Stckz. |
|---------------|------|-------|-------|-------|-----|------------|
| 10066BB0141.0 | 41,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0142.0 | 42,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0143.0 | 43,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0144.0 | 44,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0145.0 | 45,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0146.0 | 46,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0147.0 | 47,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0148.0 | 48,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0149.0 | 49,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |
| 10066BB0150.0 | 50,0 | Ø 4,0 | Ø 2,2 | Ø 3,1 | 1,0 | 500        |