

# ABSTANDSROLLEN



## Technische Beschreibung

**Material:** PA 6 , 25%GV

**Entflammbarkeit:** HB (UL 94)

**Farbe:** schwarz

**Temperaturbereich:** -35°C ~ +100°C

**Auf Anfrage :**


**Material:** Polystyrol

**Entflammbarkeit:** HB (UL 94)

**Farbe:** weiß

**Temperaturbereich:** -40°C ~ +70°C

Alle Maße sind in mm

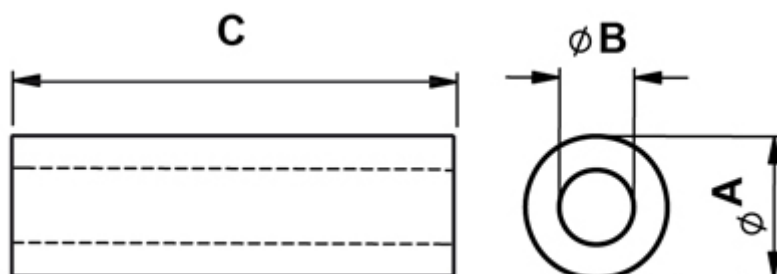

Artikel	A	B	C	VPE-Stckz.
10104BB0102.0	7,0	5,0	2,0	500
10104BB0103.0	7,0	5,0	3,0	500

Artikel	A	B	C	VPE-Stckz.
10104BB0104.0	7,0	5,0	4,0	500
10104BB0105.0	7,0	5,0	5,0	500
10104BB0106.0	7,0	5,0	6,0	500
10104BB0107.0	7,0	5,0	7,0	500
10104BB0108.0	7,0	5,0	8,0	500
10104BB0109.0	7,0	5,0	9,0	500
10104BB0110.0	7,0	5,0	10,0	500
10104BB0111.0	7,0	5,0	11,0	500
10104BB0112.0	7,0	5,0	12,0	500
10104BB0113.0	7,0	5,0	13,0	500
10104BB0114.0	7,0	5,0	14,0	500
10104BB0115.0	7,0	5,0	15,0	500
10104BB0116.0	7,0	5,0	16,0	500
10104BB0117.0	7,0	5,0	17,0	500
10104BB0118.0	7,0	5,0	18,0	500
10104BB0119.0	7,0	5,0	19,0	500
10104BB0120.0	7,0	5,0	20,0	500
10104BB0121.0	7,0	5,0	21,0	500
10104BB0122.0	7,0	5,0	22,0	500
10104BB0123.0	7,0	5,0	23,0	500
10104BB0124.0	7,0	5,0	24,0	500
10104BB0125.0	7,0	5,0	25,0	500
10104BB0126.0	7,0	5,0	26,0	500
10104BB0127.0	7,0	5,0	27,0	500
10104BB0128.0	7,0	5,0	28,0	500
10104BB0129.0	7,0	5,0	29,0	500
10104BB0130.0	7,0	5,0	30,0	500
10104BB0131.0	7,0	5,0	31,0	500
10104BB0132.0	7,0	5,0	32,0	500
10104BB0133.0	7,0	5,0	33,0	500
10104BB0134.0	7,0	5,0	34,0	500

Artikel	A	B	C	VPE-Stckz.
10104BB0135.0	7,0	5,0	35,0	500
10104BB0136.0	7,0	5,0	36,0	500
10104BB0137.0	7,0	5,0	37,0	500
10104BB0138.0	7,0	5,0	38,0	500
10104BB0139.0	7,0	5,0	39,0	500
10104BB0140.0	7,0	5,0	40,0	500
10104BB0141.0	7,0	5,0	41,0	500
10104BB0142.0	7,0	5,0	42,0	500
10104BB0143.0	7,0	5,0	43,0	500
10104BB0144.0	7,0	5,0	44,0	500
10104BB0145.0	7,0	5,0	45,0	500
10104BB0146.0	7,0	5,0	46,0	500
10104BB0147.0	7,0	5,0	47,0	500
10104BB0148.0	7,0	5,0	48,0	500
10104BB0149.0	7,0	5,0	49,0	500
10104BB0150.0	7,0	5,0	50,0	500
10104BB0151.0	7,0	5,0	51,0	500
10104BB0152.0	7,0	5,0	52,0	500
10104BB0153.0	7,0	5,0	53,0	500