

ABSTANDSROLLEN



Technische Beschreibung

Material: PA 6 , 25%GV

Entflammbarkeit: HB (UL 94)

Farbe: schwarz

Temperaturbereich: -35°C ~ +100°C

Auf Anfrage :


Material: Polystyrol

Entflammbarkeit: HB (UL 94)

Farbe: weiß

Temperaturbereich: -40°C ~ +70°C

Alle Maße sind in mm

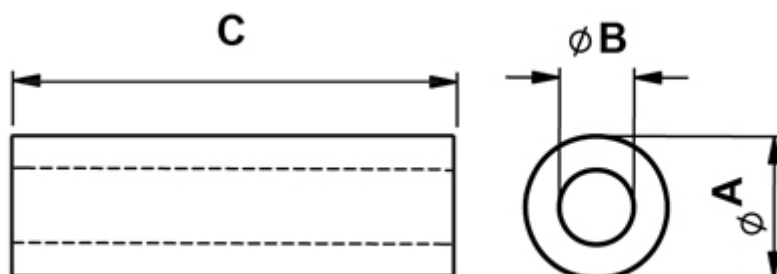

Artikel	A	B	C	VPE-Stckz.
10113BB0102.0	9,0	6,2	2,0	500
10113BB0103.0	9,0	6,2	3,0	500

Artikel	A	B	C	VPE-Stckz.
10113BB0104.0	9,0	6,2	4,0	500
10113BB0105.0	9,0	6,2	5,0	500
10113BB0106.0	9,0	6,2	6,0	500
10113BB0107.0	9,0	6,2	7,0	500
10113BB0108.0	9,0	6,2	8,0	500
10113BB0109.0	9,0	6,2	9,0	500
10113BB0110.0	9,0	6,2	10,0	500
10113BB0111.0	9,0	6,2	11,0	500
10113BB0112.0	9,0	6,2	12,0	500
10113BB0113.0	9,0	6,2	13,0	500
10113BB0114.0	9,0	6,2	14,0	500
10113BB0115.0	9,0	6,2	15,0	500
10113BB0116.0	9,0	6,2	16,0	500
10113BB0117.0	9,0	6,2	17,0	500
10113BB0118.0	9,0	6,2	18,0	500
10113BB0119.0	9,0	6,2	19,0	500
10113BB0120.0	9,0	6,2	20,0	500
10113BB0121.0	9,0	6,2	21,0	500
10113BB0122.0	9,0	6,2	22,0	500
10113BB0123.0	9,0	6,2	23,0	500
10113BB0124.0	9,0	6,2	24,0	500
10113BB0125.0	9,0	6,2	25,0	500
10113BB0126.0	9,0	6,2	26,0	500
10113BB0127.0	9,0	6,2	27,0	500
10113BB0128.0	9,0	6,2	28,0	500
10113BB0129.0	9,0	6,2	29,0	500
10113BB0130.0	9,0	6,2	30,0	500
10113BB0140.0	9,0	6,2	40,0	500
10113BB0141.0	9,0	6,2	41,0	500
10113BB0142.0	9,0	6,2	42,0	500
10113BB0143.0	9,0	6,2	43,0	500

Artikel	A	B	C	VPE-Stckz.
10113BB0144.0	9,0	6,2	44,0	500
10113BB0145.0	9,0	6,2	45,0	500
10113BB0146.0	9,0	6,2	46,0	500
10113BB0147.0	9,0	6,2	47,0	500
10113BB0148.0	9,0	6,2	48,0	500
10113BB0149.0	9,0	6,2	49,0	500
10113BB0150.0	9,0	6,2	50,0	500
10113BB0151.0	9,0	6,2	51,0	500
10113BB0152.0	9,0	6,2	52,0	500
10113BB0153.0	9,0	6,2	53,0	500
10113BB0154.0	9,0	6,2	54,0	500
10113BB0155.0	9,0	6,2	55,0	500
10113BB0156.0	9,0	6,2	56,0	500
10113BB0157.0	9,0	6,2	57,0	500
10113BB0158.0	9,0	6,2	58,0	500
10113BB0159.0	9,0	6,2	59,0	500
10113BB0160.0	9,0	6,2	60,0	500
10113BB0161.0	9,0	6,2	61,0	500
10113BB0162.0	9,0	6,2	62,0	500
10113BB0163.0	9,0	6,2	63,0	500