

# ABSTANDSROLLEN



## Technische Beschreibung

**Material:** PA 6 , 25%GV

**Entflammbarkeit:** HB (UL 94)

**Farbe:** schwarz

**Temperaturbereich:** -35°C ~ +100°C

**Auf Anfrage :**


**Material:** Polystyrol

**Entflammbarkeit:** HB (UL 94)

**Farbe:** weiß

**Temperaturbereich:** -40°C ~ +70°C

Alle Maße sind in mm

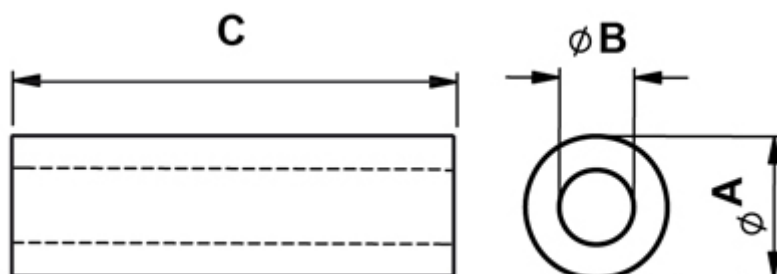

Artikel	A	B	C	VPE-Stckz.
10114BB0102.0	9,0	7,0	2,0	500
10114BB0103.0	9,0	7,0	3,0	500

Artikel	A	B	C	VPE-Stckz.
10114BB0104.0	9,0	7,0	4,0	500
10114BB0105.0	9,0	7,0	5,0	500
10114BB0106.0	9,0	7,0	6,0	500
10114BB0107.0	9,0	7,0	7,0	500
10114BB0108.0	9,0	7,0	8,0	500
10114BB0109.0	9,0	7,0	9,0	500
10114BB0110.0	9,0	7,0	10,0	500
10114BB0111.0	9,0	7,0	11,0	500
10114BB0112.0	9,0	7,0	12,0	500
10114BB0113.0	9,0	7,0	13,0	500
10114BB0114.0	9,0	7,0	14,0	500
10114BB0115.0	9,0	7,0	15,0	500
10114BB0116.0	9,0	7,0	16,0	500
10114BB0117.0	9,0	7,0	17,0	500
10114BB0118.0	9,0	7,0	19,0	500
10114BB0119.0	9,0	7,0	20,0	500
10114BB0120.0	9,0	7,0	20,0	500
10114BB0121.0	9,0	7,0	21,0	500
10114BB0122.0	9,0	7,0	22,0	500
10114BB0123.0	9,0	7,0	23,0	500
10114BB0124.0	9,0	7,0	24,0	500
10114BB0125.0	9,0	7,0	25,0	500
10114BB0126.0	9,0	7,0	26,0	500
10114BB0127.0	9,0	7,0	27,0	500
10114BB0128.0	9,0	7,0	28,0	500
10114BB0129.0	9,0	7,0	29,0	500
10114BB0130.0	9,0	7,0	30,0	500
10114BB0140.0	9,0	7,0	40,0	500
10114BB0141.0	9,0	7,0	41,0	500
10114BB0142.0	9,0	7,0	42,0	500
10114BB0143.0	9,0	7,0	43,0	500

Artikel	A	B	C	VPE-Stckz.
10114BB0144.0	9,0	7,0	44,0	500
10114BB0145.0	9,0	7,0	45,0	500
10114BB0146.0	9,0	7,0	46,0	500
10114BB0147.0	9,0	7,0	47,0	500
10114BB0148.0	9,0	7,0	48,0	500
10114BB0149.0	9,0	7,0	49,0	500
10114BB0150.0	9,0	7,0	50,0	500