

ABSTANDSROLLEN AD 5,0/ID 2,2



Technische Beschreibung

Material: PA 6 , 25%GV

Entflammbarkeit: HB (UL 94)

Farbe: schwarz

Temperaturbereich: -35°C ~ +100°C

Alternativ:


Material: Polystyrol

Entflammbarkeit: HB (UL 94)

Farbe: weiß

Temperaturbereich: -40°C ~ +70°C

Alle Maße sind in mm

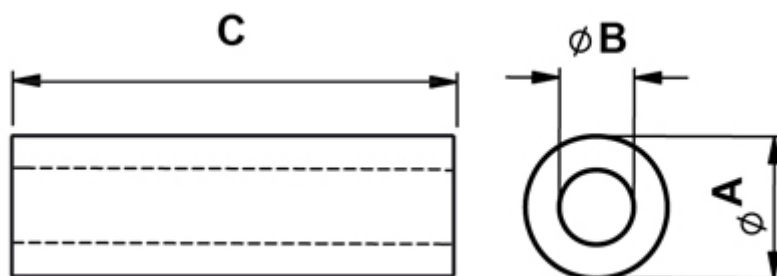

Artikel	A	B	C	VPE-Stckz.
10089BB0102.0	5,0	2,2	2,0	500
10089BB0103.0	5,0	2,2	3,0	500

Artikel	A	B	C	VPE-Stckz.
10089BB0104.0	5,0	2,2	4,0	500
10089BB0105.0	5,0	2,2	5,0	500
10089BB0106.0	5,0	2,2	6,0	500
10089BB0107.0	5,0	2,2	7,0	500
10089BB0108.0	5,0	2,2	8,0	500
10089BB0109.0	5,0	2,2	9,0	500
10089BB0110.0	5,0	2,2	10,0	500
10089BB0111.0	5,0	2,2	11,0	500
10089BB0112.0	5,0	2,2	12,0	500
10089BB0113.0	5,0	2,2	13,0	500
10089BB0114.0	5,0	2,2	14,0	500
10089BB0115.0	5,0	2,2	15,0	500
10089BB0116.0	5,0	2,2	16,0	500
10089BB0117.0	5,0	2,2	17,0	500
10089BB0118.0	5,0	2,2	18,0	500
10089BB0119.0	5,0	2,2	19,0	500
10089BB0120.0	5,0	2,2	20,0	500
10089BB0121.0	5,0	2,2	21,0	500
10089BB0122.0	5,0	2,2	22,0	500
10089BB0123.0	5,0	2,2	23,0	500
10089BB0124.0	5,0	2,2	24,0	500
10089BB0125.0	5,0	2,2	25,0	500
10089BB0126.0	5,0	2,2	26,0	500
10089BB0127.0	5,0	2,2	27,0	500
10089BB0128.0	5,0	2,2	28,0	500
10089BB0129.0	5,0	2,2	29,0	500
10089BB0130.0	5,0	2,2	30,0	500
10089BB0131.0	5,0	2,2	31,0	500
10089BB0132.0	5,0	2,2	32,0	500
10089BB0133.0	5,0	2,2	33,0	500
10089BB0134.0	5,0	2,2	34,0	500

Artikel	A	B	C	VPE-Stckz.
10089BB0135.0	5,0	2,2	35,0	500
10089BB0136.0	5,0	2,2	36,0	500
10089BB0137.0	5,0	2,2	37,0	500
10089BB0138.0	5,0	2,2	38,0	500
10089BB0139.0	5,0	2,2	39,0	500
10089BB0140.0	5,0	2,2	40,0	500
10089BB0141.0	5,0	2,2	41,0	500
10089BB0142.0	5,0	2,2	42,0	500
10089BB0143.0	5,0	2,2	43,0	500
10089BB0144.0	5,0	2,2	44,0	500
10089BB0145.0	5,0	2,2	45,0	500