

ABSTANDSROLLEN AD 16,0/ID 12,4



Technische Beschreibung

Material: PA 6 , 25%GV

Entflammbarkeit: HB (UL 94)

Farbe: schwarz

Temperaturbereich: -35°C ~ +100°C

Auf Anfrage :


Material: Polystyrol

Entflammbarkeit: HB (UL 94)

Farbe: weiß

Temperaturbereich: -40°C ~ +70°C

Alle Maße sind in mm

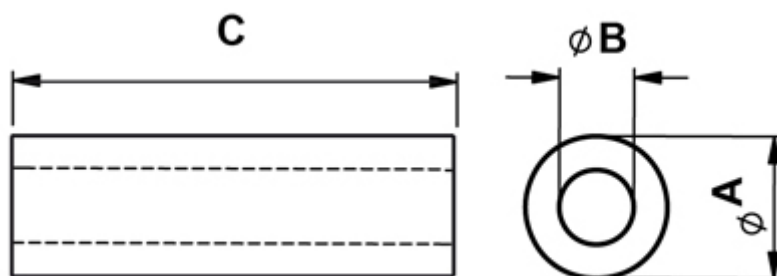

Artikel	A	B	C	VPE-Stckz.
10135BB0102.0	16,0	12,4	2,0	500
10135BB0103.0	16,0	12,4	3,0	500

Artikel	A	B	C	VPE-Stckz.
10135BB0104.0	16,0	12,4	4,0	500
10135BB0105.0	16,0	12,4	5,0	500
10135BB0106.0	16,0	12,4	6,0	500
10135BB0107.0	16,0	12,4	7,0	500
10135BB0108.0	16,0	12,4	8,0	500
10135BB0109.0	16,0	12,4	9,0	500
10135BB0110.0	16,0	12,4	10,0	500
10135BB0111.0	16,0	12,4	11,0	500
10135BB0112.0	16,0	12,4	12,0	500
10135BB0113.0	16,0	12,4	13,0	500
10135BB0114.0	16,0	12,4	14,0	500
10135BB0115.0	16,0	12,4	15,0	500
10135BB0116.0	16,0	12,4	16,0	500
10135BB0117.0	16,0	12,4	17,0	500
10135BB0118.0	16,0	12,4	18,0	500
10135BB0119.0	16,0	12,4	19,0	500
10135BB0120.0	16,0	12,4	20,0	500
10135BB0121.0	16,0	12,4	21,0	500
10135BB0122.0	16,0	12,4	22,0	500
10135BB0123.0	16,0	12,4	23,0	500
10135BB0124.0	16,0	12,4	24,0	500
10135BB0125.0	16,0	12,4	25,0	500
10135BB0126.0	16,0	12,4	26,0	500
10135BB0127.0	16,0	12,4	27,0	500
10135BB0128.0	16,0	12,4	28,0	500
10135BB0129.0	16,0	12,4	29,0	500
10135BB0130.0	16,0	12,4	30,0	500
10135BB0131.0	16,0	12,4	31,0	500
10135BB0132.0	16,0	12,4	32,0	500
10135BB0133.0	16,0	12,4	33,0	500
10135BB0134.0	16,0	12,4	34,0	500

Artikel	A	B	C	VPE-Stckz.
10135BB0135.0	16,0	12,4	35,0	500
10135BB0136.0	16,0	12,4	36,0	500
10135BB0137.0	16,0	12,4	37,0	500
10135BB0138.0	16,0	12,4	38,0	500
10135BB0139.0	16,0	12,4	39,0	500
10135BB0140.0	16,0	12,4	40,0	500
10135BB0141.0	16,0	12,4	41,0	500
10135BB0142.0	16,0	12,4	42,0	500
10135BB0143.0	16,0	12,4	43,0	500
10135BB0144.0	16,0	12,4	44,0	500
10135BB0145.0	16,0	12,4	45,0	500
10135BB0146.0	16,0	12,4	46,0	500
10135BB0147.0	16,0	12,4	47,0	500
10135BB0148.0	16,0	12,4	48,0	500
10135BB0149.0	16,0	12,4	49,0	500
10135BB0150.0	16,0	12,4	50,0	500