


BLINDLOCHABDECKUNG | BOHRUNG Ø 4,0 – 23,0

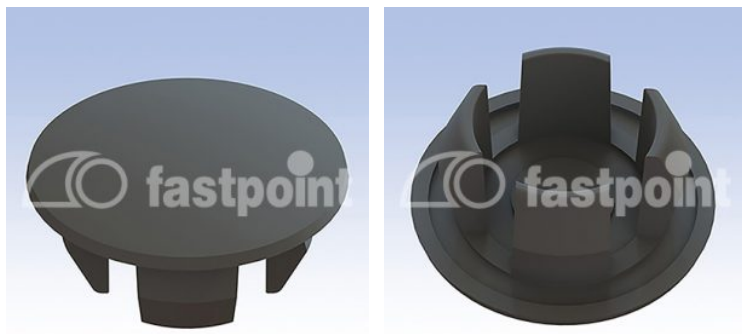

Technische Beschreibung


Material: PA 6.6

Entflammbarkeit : V2 (UL94)

Temperaturbereich: -35°C ~ +85°C

Farbe: Natur oder Schwarz

Alle Maße in mm

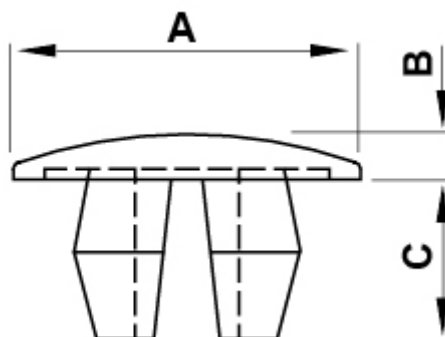

Artikel	A	B	C	Bohrung	Stärke	VPE-Stckz.
0226AA01	8,0	1,5	5,5	Ø 4,0	0,5 - 3	2.500
0227AA01	10,3	1,5	5,5	Ø 5,5	0,5 - 3	2.500
0228AA01	10,5	1,5	5,5	Ø 6,0	0,5 - 3	2.500
0230AA01	12,5	1,5	6,0	Ø 8,0	0,5 - 3	2.500
0231AA01	14,0	2,0	7,3	Ø 9,5	0,5 - 4	2.500
0232AA01	17,5	2,0	6,5	Ø 12,5	0,5 - 2,5	2.500
0233AA01	25,0	2,0	8,5	Ø 19,5	1 - 4	2.500
0235AA01	31,5	2,0	6,5	Ø 25,0	0,5 - 3	2.500
1099AA01	14,5	2,0	8,0	Ø 8,0	0,5 - 4	2.500

Artikel	A	B	C	Bohrung	Stärke	VPE-Stckz.
2338AA01	23,6	2,6	5,5	Ø 16,0	0,5 - 1,2	2.500
2472AA01	27,0	2,0	6,0	Ø 23,0	0,5 - 2	2.500