

GETEILTE KABELVERSCHRAUBUNG MIT GEGENMUTTER M25 - M32 - M63



Technische Beschreibung


Material: PP+GF

Entflammbarkeit: V0 (UL94)

Betriebstemperatur: -40° ~ +155° C

Farbe: Schwarz

Alle Maße in mm

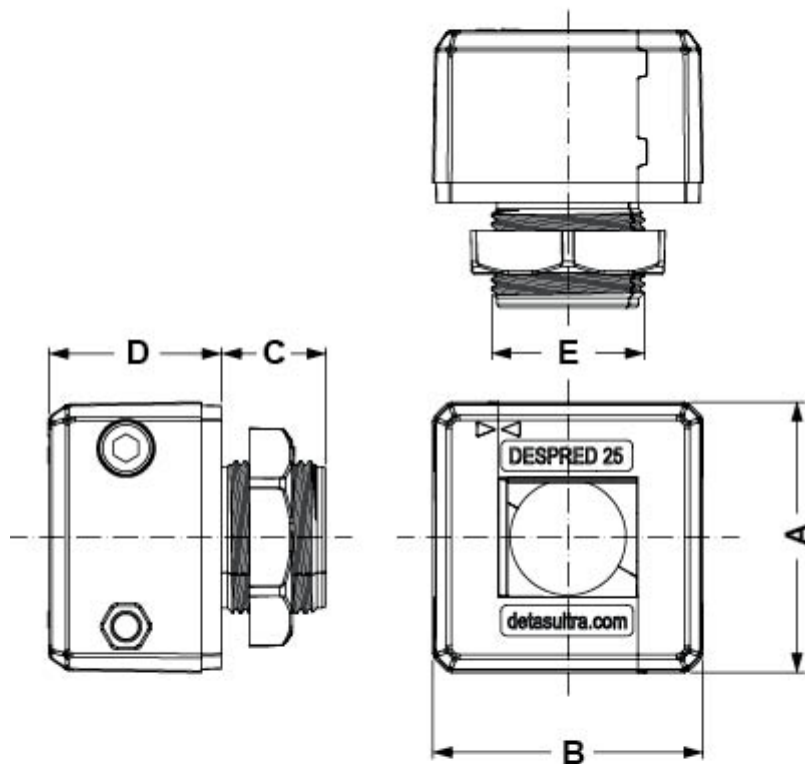

Artikel	A	B	C	D	E	VPE-Stckz.
16018FG01	44,0	44,0	17,0	28,0	M25x1,5	10
16019FG01	44,0	44,0	17,0	28,0	M32x1,5	10
16020FG01	66,0	66,0	17,0	28,0	M63x1,5	10