

GETEILTE KABELVERSCHRAUBUNG MIT GEGENMUTTER OSF



Technische Beschreibung


Material: PC

Farbe: grau und schwarz

Entflammbarkeit: V0 (UL94)

Temperaturbereich: -40°C ~ +155°C

Alle Maße sind in mm

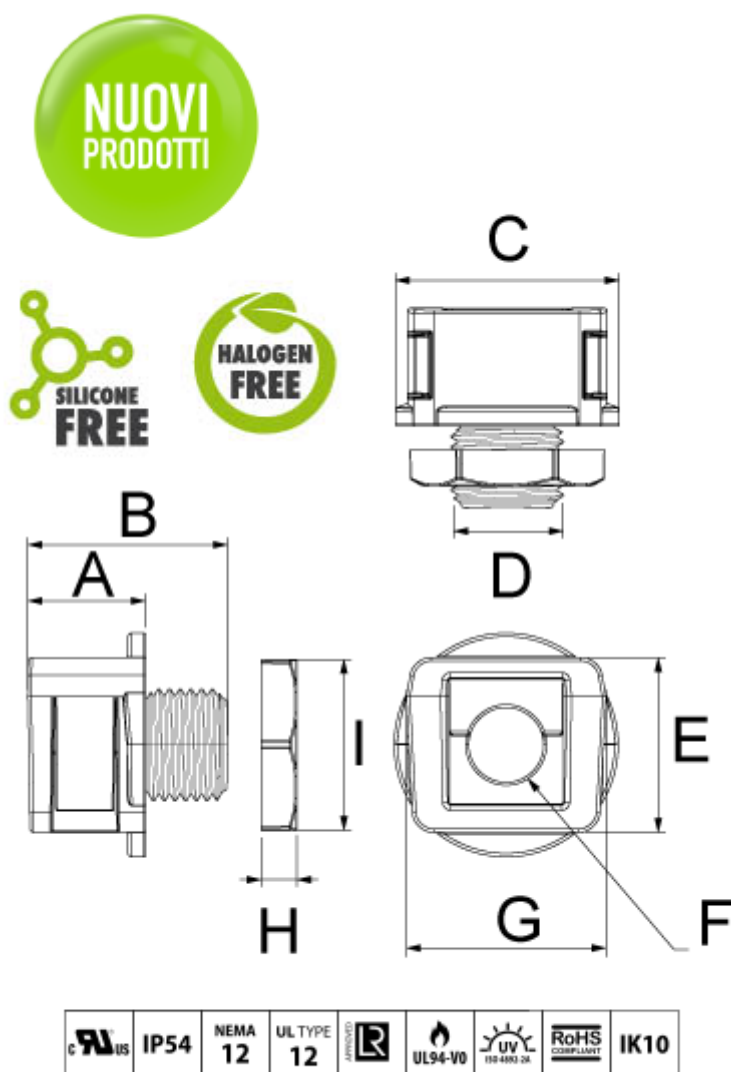

Artikel	A	B	C	D	E	F	G	H	I	Farbe	VPE-Stckz.
15939FG01	16,5	28,0	Ø 31,4	M16 X 1,5	24,5	10,5	28,0	5,0	24,0	Nero - Black - Schwarz	10
15939FG11	16,5	28,0	Ø 31,4	M16 X 1,5	24,5	10,5	28,0	5,0	24,0	Grigio - Gray - Grau	10
15940FG01	16,5	28,0	Ø 31,4	M20 X 1,5	24,5	14,5	28,0	7,0	26,0	Nero - Black - Schwarz	10
15940FG11	16,5	28,0	Ø 31,4	M20 X 1,5	24,5	14,5	28,0	7,0	26,0	Grigio - Gray - Grau	10

Artikel	A	B	C	D	E	F	G	H	I	Farbe	VPE-Stckz.
15941FG01	16,5	28,0	Ø 31,4	M25 x 1,5	24,5	28,0	7,0	32,0	Nero - Black - Schwarz	10	
15941FG11	16,5	28,0	Ø 31,4	M25 x 1,5	24,5	28,0	7,0	32,0	Grigio - Gray - Grau	10	
15942FG01	16,5	28,0	Ø 38,6	M32 x 1,5	24,5	28,0	7,0	41,0	Nero - Black - Schwarz	10	
15942FG11	16,5	28,0	Ø 38,6	M32 x 1,5	24,5	28,0	7,0	41,0	Grigio - Gray - Grau	10	