


GETEILTE RAHMEN FÜR VORKONFEKTIONIERTE KABEL

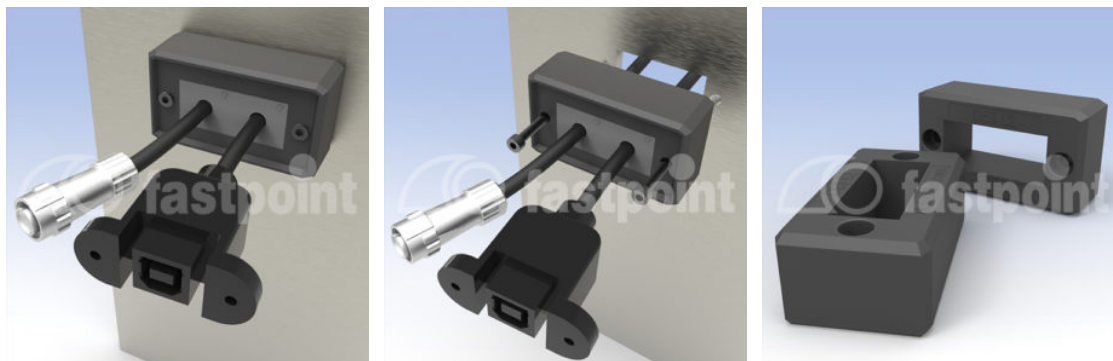

Technische Beschreibung


Material: PP+GF

Entflammbarkeit: V0 (UL94)

Betriebstemperatur: -40° ~ +155° C

Farbe: Schwarz

Alle Maße in mm

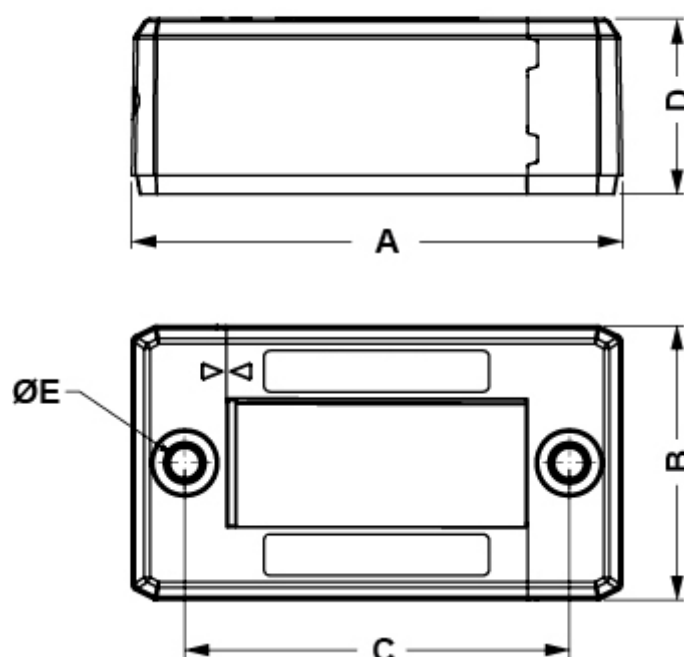

Artikel	A	B	C	D	E	Bohrung	VPE-Stckz.
16000FG01	74,0	41,4	58,0	26,5	Ø4,5	40,0 x 18,0	10

Artikel	A	B	C	D	E	Bohrung	VPE-Stckz.
16001FG01	99,0	41,4	83,0	26,5	Ø4,5	63,0 x 18,0	10
16002FG01	120,0	41,4	103,0	26,5	Ø9,0	86,0 x 18,0	10
16003FG01	146,0	41,4	130,0	26,5	Ø9,0	108,0 x 18,0	10