


GETEILTER RAHMEN FÜR VORKONFEKTIONIERTE KABEL

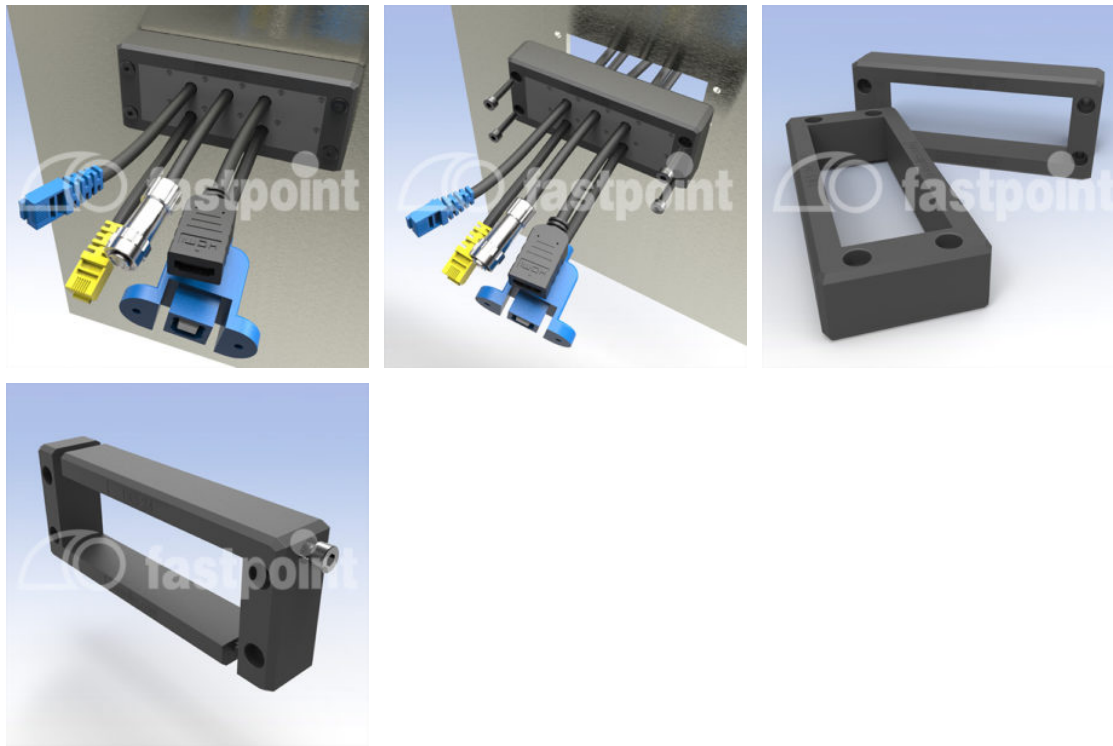

Technische Beschreibung


Material: PP+GF

Entflammbarkeit: V0 (UL94)

Betriebstemperatur: -40° ~ +155° C

Farbe: Schwarz

Alle Maße in mm

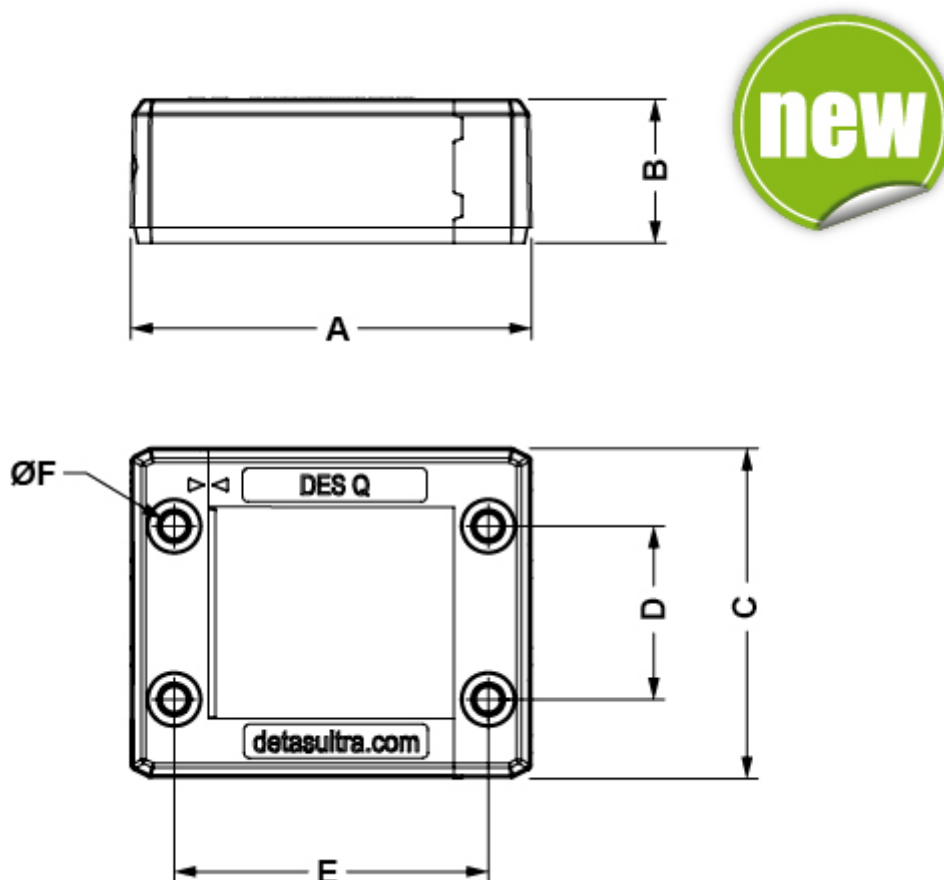

Artikel	A	B	C	D	E	F	Bohrung	VPE-Stckz.
16004FG01	74,0	26,5	61,0	32,0	58,0	Ø4,5	40,0 x 39,0	10
16005FG01	99,0	26,5	61,0	32,0	83,0	Ø4,5	63,0 x 39,0	10
16006FG01	120,0	26,5	61,0	32,0	103,5	Ø4,5	86,0 x 39,0	10
16007FG01	146,0	26,5	61,0	32,0	130,0	Ø4,5	108,0 x 39,0	10