


KABELBINDER STANDARD

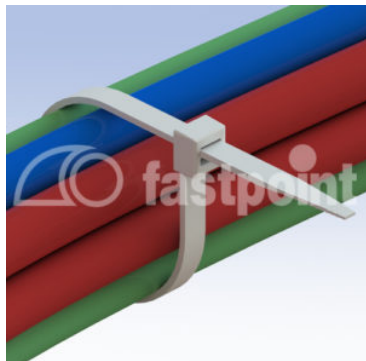

Technische Beschreibung

Material: PA 6.6

Farbe: Schwarz oder natur

Entflammbarkeit : V2 (UL94)

Betriebstemperatur: -35°C ~ +85°C

Alle Maße sind in mm.

Für Farbe schwarz bitte Farbcode AA01 verwenden

Produktvarianten

Artikel	A	B	Max Kabel	Mindestlast (kg)	VPE-Stckz.
0139AA00	135,0	2,5	32,0	8,1	1.000
0374AA00					
0375AA00	450,0	7,6	130,0	54,4	100
0376AA00	360,0	4,8	103,0	22,2	100
0377AA00	98,0	2,5	21,0	8,1	1.000
0381AA00	150,0	7,6	33,0	54,4	100
0382AA00	200,0	2,5	52,0	8,1	1.000
0383AA00	140,0	3,6	35,0	13,26	1.000
0384AA00	160,0	4,5	40,0	22,2	1.000
0385AA00	188,0	4,8	45,0	22,2	1.000
0386AA00	200,0	4,8	50,0	22,2	1.000
0387AA00	280,0	4,8	79,0	22,2	1.000
0388AA00	77,0	2,2	15,0	6,12	1.000
0390AA00	180,0	7,6	45,0	54,4	100

Artikel	A	B	Max Kabel	Mindestlast (kg)	VPE-Stckz.
0391AA00	240,0	7,6	63,0	54,4	100
0392AA00	530,0	7,6	158,0	54,4	100
0393AA00	750,0	7,6	200,0	54,4	100
1289AA00	120,0	4,5	24,0	22,2	1.000
1290AA00	250,0	4,8	68,0	22,2	1.000
1291AA00	292,0	7,6	80,0	54,4	100
1292AA00	775,0	9,0	233,0	71,4	100
1294AA00	485,0	12,5	143,0	110,0	100
1295AA00	720,0	12,5	213,0	110,0	100
1296AA00	850,0	12,5	255,0	110,0	100
1297AA00	1.000,0	12,5	302,0	110,0	100
2294AA00	200,0	3,6	50,0	13,26	1.000
2295AA00	290,0	3,6	80,0	13,26	1.000
2297AA00	160,0	2,5	40,0	8,1	1.000
2431AA00	430,0	4,8	115,0	22,2	100
3717AA00	390,0	4,8	106,0	22,2	100
3786AA00	370,0	3,6	103,0	13,26	100
5346AA00	925,0	4,8	263,0	40,0	100