

# KABEL-UND LEITUNGSFÜHRUNGSKETTE 25,0 X 17,0



## Technische Beschreibung

**Material:** PA 6.6


**Entflammbarkeit:** V2 (UL 94)

**Temperaturbereich:** -35° ~ +85°C

**Farbe:** Schwarz

**J** = Menge

Alle Maße in mm

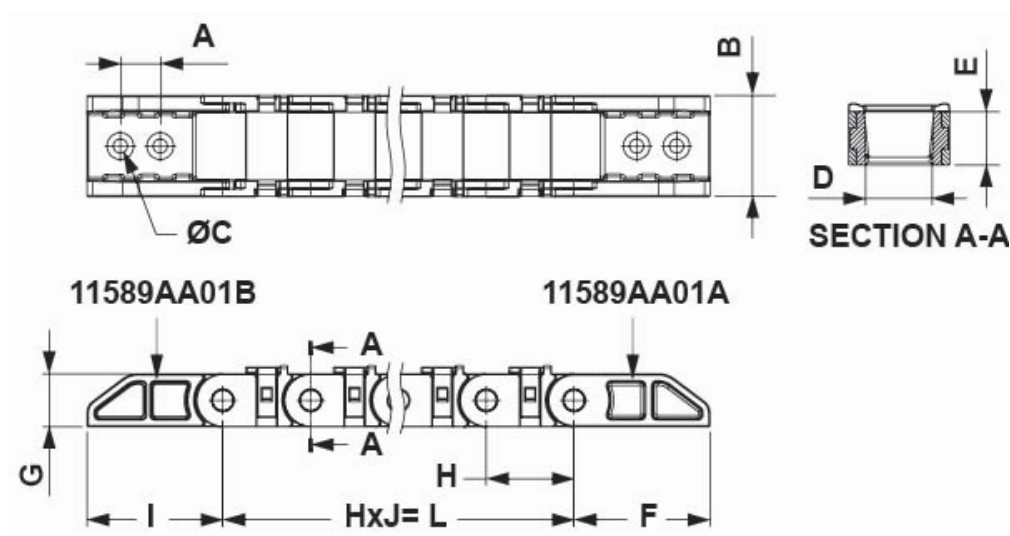

Artikel	A	B	C	D	E	F	G	H	I	J	VPE-Stckz.
11589AA0105	15,0	37,8	M5	25,0	17,0	51,0	20,0	32,5	51,0	5,0	1.000
11589AA0110	15,0	37,8	M5	25,0	17,0	51,0	20,0	32,5	51,0	10,0	1.000
11589AA0115	15,0	37,8	M5	25,0	17,0	51,0	20,0	32,5	51,0	15,0	1.000
11589AA0120	15,0	37,8	M5	25,0	17,0	51,0	20,0	32,5	51,0	20,0	1.000
11589AA0125	15,0	37,8	M5	25,0	17,0	51,0	20,0	32,5	51,0	25,0	1.000
11589AA0130	15,0	37,8	M5	25,0	17,0	51,0	20,0	32,5	51,0	30,0	1.000

Artikel	A	B	C	D	E	F	G	H	I	J	VPE-Stckz.
11589AA0135	15,0	37,8	M5	25,0	17,0	51,0	20,0	32,5	51,0	35,0	1.000
11589AA0140	15,0	37,8	M5	25,0	17,0	51,0	20,0	32,5	51,0	40,0	1.000
11589AA0145	15,0	37,8	M5	25,0	17,0	51,0	20,0	32,5	51,0	45,0	1.000
11589AA0150	15,0	37,8	M5	25,0	17,0	51,0	20,0	32,5	51,0	50,0	1.000
11589AA0155	15,0	37,8	M5	25,0	17,0	51,0	20,0	32,5	51,0	55,0	1.000
11589AA0160	15,0	37,8	M5	25,0	17,0	51,0	20,0	32,5	51,0	60,0	1.000
11589AA0165	15,0	37,8	M5	25,0	17,0	51,0	20,0	32,5	51,0	65,0	1.000
11589AA0170	15,0	37,8	M5	25,0	17,0	51,0	20,0	32,5	51,0	70,0	1.000
11589AA01A	15,0	37,8	M5	25,0	17,0	51,0	20,0	32,5	51,0	-	1.000
11589AA01B	15,0	37,8	M5	25,0	17,0	51,0	20,0	32,5	51,0	-	1.000