

KABEL-UND LEITUNGSFÜHRUNGSKETTE 20,2 X 12,7



Technische Beschreibung

Material: PA 6.6


Entflammbarkeit: V2 (UL 94)

Temperaturbereich: -35° ~ +85°C

Farbe: Schwarz

J = Menge

Alle Maße in mm

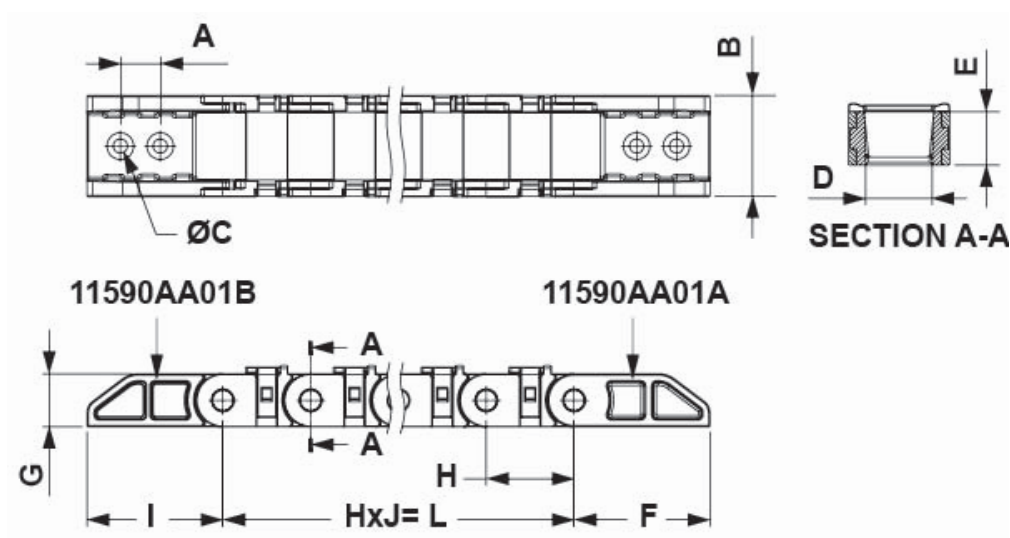

Artikel	A	B	C	D	E	F	G	H	I	J	VPE-Stckz.
11590AA0105	15,0	29,0	M2,6	20,2	12,7	40,0	15,1	15,0	40,0	5,0	1.000
11590AA0110	15,0	29,0	M2,6	20,2	12,7	40,0	15,1	15,0	40,0	10,0	1.000
11590AA0115	15,0	29,0	M2,6	20,2	12,7	40,0	15,1	15,0	40,0	15,0	1.000
11590AA0120	15,0	29,0	M2,6	20,2	12,7	40,0	15,1	15,0	40,0	20,0	1.000
11590AA0125	15,0	29,0	M2,6	20,2	12,7	40,0	15,1	15,0	40,0	25,0	1.000
11590AA0130	15,0	29,0	M2,6	20,2	12,7	40,0	15,1	15,0	40,0	30,0	1.000

Artikel	A	B	C	D	E	F	G	H	I	J	VPE-Stckz.
11590AA0135	15,0	29,0	M2,6	20,2	12,7	40,0	15,1	15,0	40,0	35,0	1.000
11590AA0140	15,0	29,0	M2,6	20,2	12,7	40,0	15,1	15,0	40,0	40,0	1.000
11590AA0145	15,0	29,0	M2,6	20,2	12,7	40,0	15,1	15,0	40,0	45,0	1.000
11590AA0150	15,0	29,0	M2,6	20,2	12,7	40,0	15,1	15,0	40,0	50,0	1.000
11590AA0155	15,0	29,0	M2,6	20,2	12,7	40,0	15,1	15,0	40,0	55,0	1.000
11590AA0160	15,0	29,0	M2,6	20,2	12,7	40,0	15,1	15,0	40,0	60,0	1.000
11590AA0165	15,0	29,0	M2,6	20,2	12,7	40,0	15,1	15,0	40,0	65,0	1.000
11590AA0170	15,0	29,0	M2,6	20,2	12,7	40,0	15,1	15,0	40,0	70,0	1.000
11590AA01A	15,0	29,0	M2,6	20,2	12,7	40,0	15,1	15,0	40,0	-	1.000
11590AA01B	15,0	29,0	M2,6	20,2	12,7	40,0	15,1	15,0	40,0	-	1.000