

KABEL- UND LEITUNGSFÜHRUNGSKETTE 29,0 X 10,6



Technische Beschreibung

Material: PA 6.6


Entflammbarkeit: V2 (UL 94)

Temperaturbereich: -35° ~ +85°C

Farbe: Schwarz

J = Menge

Alle Maße in mm

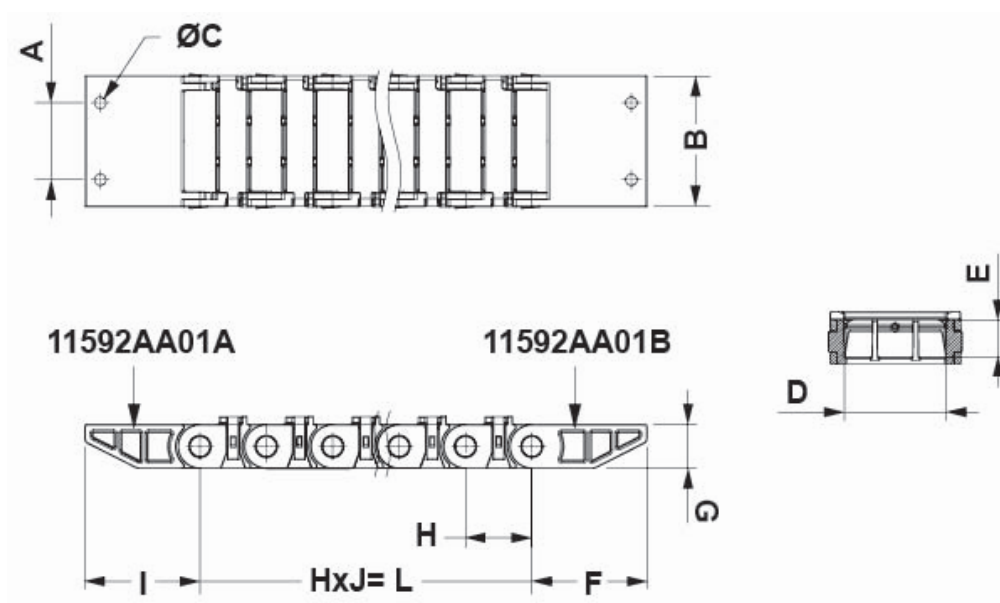

Artikel	A	B	C	D	E	F	G	H	I	J	VPE-Stckz.
11592AA0105	22,0	38,5	M3	29,0	10,6	33,0	12,6	19,0	33,0	5,0	1.000
11592AA0110	22,0	38,5	M3	29,0	10,6	33,0	12,6	19,0	33,0	10,0	1.000
11592AA0115	22,0	38,5	M3	29,0	10,6	33,0	12,6	19,0	33,0	15,0	1.000
11592AA0120	22,0	38,5	M3	29,0	10,6	33,0	12,6	19,0	33,0	20,0	1.000

Artikel	A	B	C	D	E	F	G	H	I	J	VPE-Stckz.
11592AA0125	22,0	38,5	M3	29,0	10,6	33,0	12,6	19,0	33,0	25,0	1.000
11592AA0130	22,0	38,5	M3	29,0	10,6	33,0	12,6	19,0	33,0	30,0	1.000
11592AA0135	22,0	38,5	M3	29,0	10,6	33,0	12,6	19,0	33,0	35,0	1.000
11592AA0140	22,0	38,5	M3	29,0	10,6	33,0	12,6	19,0	33,0	40,0	1.000
11592AA0145	22,0	38,5	M3	29,0	10,6	33,0	12,6	19,0	33,0	45,0	1.000
11592AA0150	22,0	38,5	M3	29,0	10,6	33,0	12,6	19,0	33,0	50,0	1.000
11592AA0155	22,0	38,5	M3	29,0	10,6	33,0	12,6	19,0	33,0	55,0	1.000
11592AA0160	22,0	38,5	M3	29,0	10,6	33,0	12,6	19,0	33,0	60,0	1.000
11592AA0165	22,0	38,5	M3	29,0	10,6	33,0	12,6	19,0	33,0	65,0	1.000
11592AA0170	22,0	38,5	M3	29,0	10,6	33,0	12,6	19,0	33,0	70,0	1.000
11592AA01A	22,0	38,5	M3	29,0	10,6	33,0	12,6	19,0	33,0	-	1.000
11592AA01B	22,0	38,5	M3	29,0	10,6	33,0	12,6	19,0	33,0	-	1.000