


KABEL- UND LEITUNGSFÜHRUNGSKETTE 6,0 X 8,7

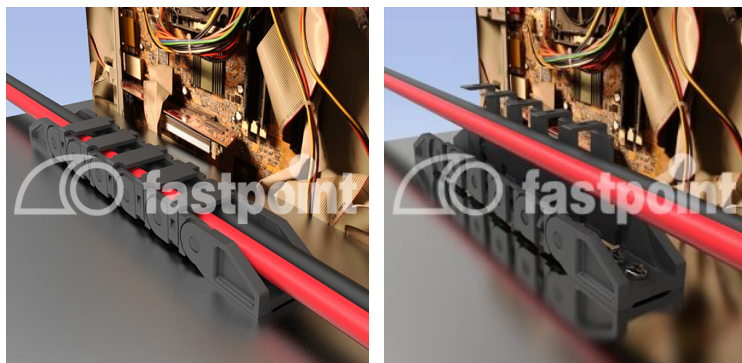

Technische Beschreibung

Material: PA 6.6


Entflammbarkeit: V2 (UL 94)

Temperaturbereich: -35° ~ +85°C

Farbe: Schwarz

J = Menge

Alle Maße in mm

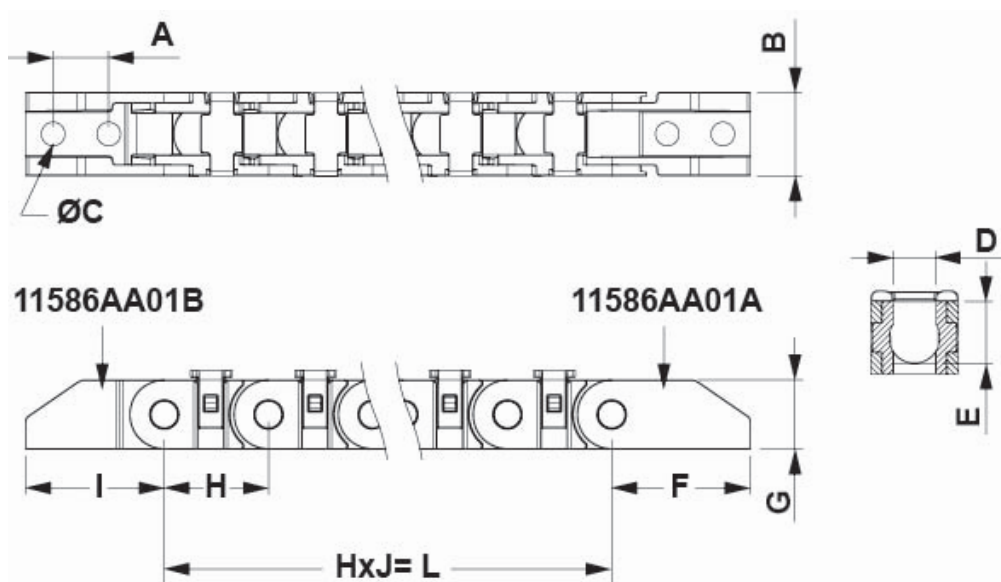

Artikel	A	B	C	D	E	F	G	H	I	J	VPE-Stckz.
11586AA0105	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	5,0	1.000
11586AA0110	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	10,0	1.000

Artikel	A	B	C	D	E	F	G	H	I	J	VPE-Stckz.
11586AA0115	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	15,0	1.000
11586AA0120	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	20,0	1.000
11586AA0125	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	25,0	1.000
11586AA0130	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	30,0	1.000
11586AA0135	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	35,0	1.000
11586AA0140	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	40,0	1.000
11586AA0145	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	45,0	1.000
11586AA0150	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	50,0	1.000
11586AA0155	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	55,0	1.000
11586AA0160	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	60,0	1.000
11586AA0165	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	65,0	1.000
11586AA0170	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	70,0	1.000
11586AA01A	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	-	1.000
11586AA01B	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	-	1.000