


LICHTLEITER

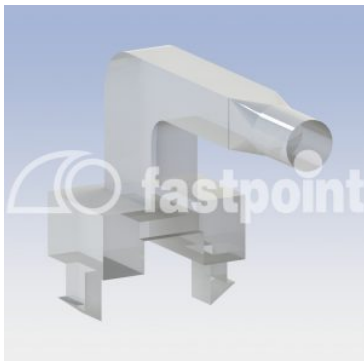

Technische Beschreibung


Material: PC

Entflammbarkeit: V2 (UL94)

Temperaturbereich: -40° ~ +80°C

Farbe: Transparent

Alle Maße in mm

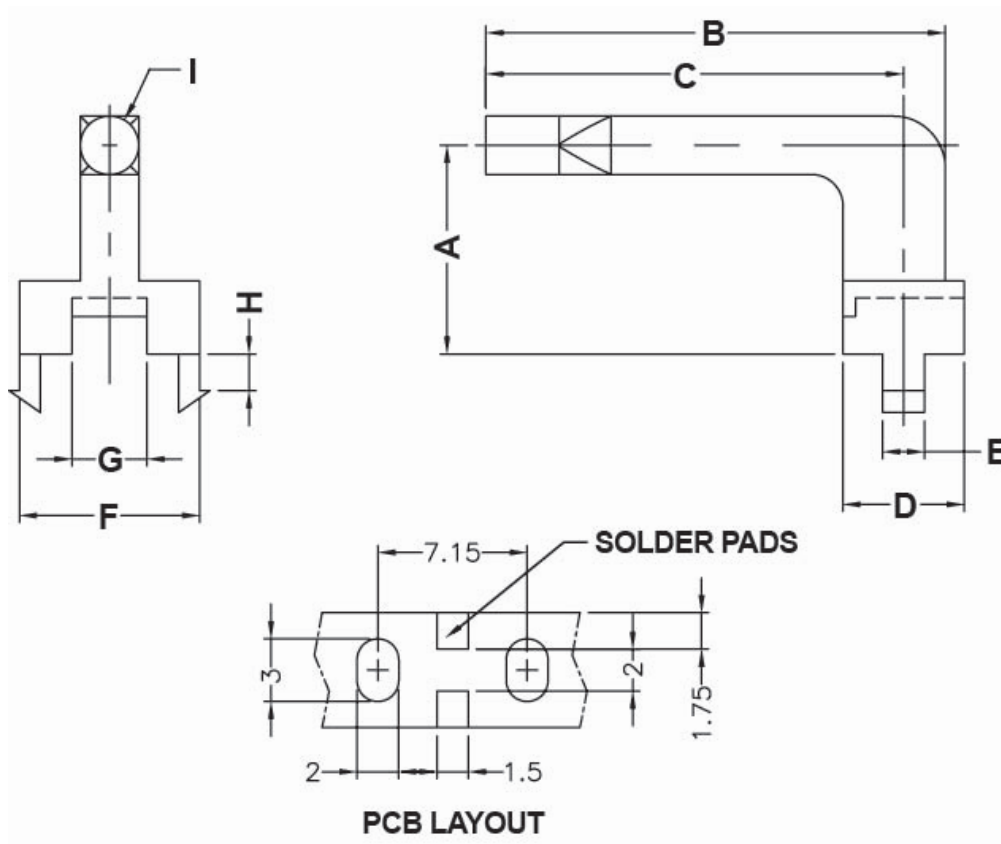

Artikel	A	B	C	D	E	F	G	H	I	VPE-Stckz.
14051NA00	5,0	16,0	14,0	5,8	2,0	8,6	3,6	1,75	Ø 2,8	1.000
14052NA00	5,0	19,0	17,0	5,8	2,0	8,6	3,6	1,75	Ø 2,8	1.000
14053NA00	5,0	22,0	20,0	5,8	2,0	8,6	3,6	1,75	Ø 2,8	1.000
14054NA00	10,0	16,0	14,0	5,8	2,0	8,6	3,6	1,75	Ø 2,8	1.000
14055NA00	10,0	19,0	17,0	5,8	2,0	8,6	3,6	1,75	Ø 2,8	1.000
14056NA00	10,0	22,0	20,0	5,8	2,0	8,6	3,6	1,75	Ø 2,8	1.000
14057NA00	15,0	16,0	14,0	5,8	2,0	8,6	3,6	1,75	Ø 2,8	1.000
14058NA00	15,0	19,0	17,0	5,8	2,0	8,6	3,6	1,75	Ø 2,8	1.000
14059NA00	15,0	22,0	20,0	5,8	2,0	8,6	3,6	1,75	Ø 2,8	1.000