

LICHTLEITER ZUR VERSENKTEN MONTAGE IN EINER FRONTPLATTE



Technische Beschreibung


Material: PC

Entflammbarkeit: V0 (UL94)

Temperaturbereich: -40° ~ +115°C

Farbe: Transparent

Alle Maße in mm

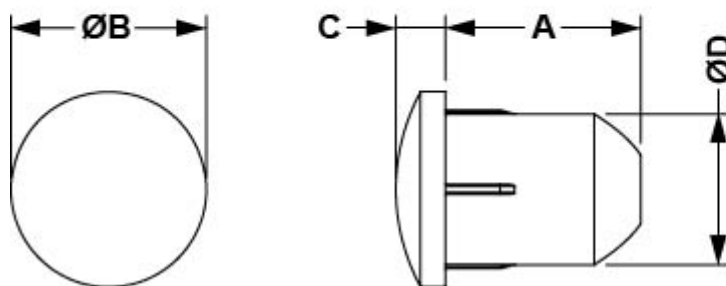

Artikel	A	B	C	D	Bohrung	VPE-Stckz.
12656NV00	3,2	Ø 5,0	1,3	Ø 3,9	Ø 3,96	1.000
14496NV00	4,0	Ø 5,0	1,3	Ø 3,9	Ø 3,96	1.000
14497NV00	5,0	Ø 5,0	1,3	Ø 3,9	Ø 3,96	1.000
14498NV00	6,0	Ø 5,0	1,3	Ø 3,9	Ø 3,96	1.000

Artikel	A	B	C	D	Bohrung	VPE-Stckz.
14499NV00	8,0	Ø 5,0	1,3	Ø 3,9	Ø 3,96	1.000
14500NV00	10,0	Ø 5,0	1,3	Ø 3,9	Ø 3,96	1.000
14501NV00	12,7	Ø 5,0	1,3	Ø 3,9	Ø 3,96	1.000