


NICHT ISOLIERTE KUPFERROHRKABELSCHUHE MIT SCHMALEM FLANSCH



Technische Beschreibung

Material: CU-galv. verzinkt gem. DIN EN 13600

*Alle Maße in mm

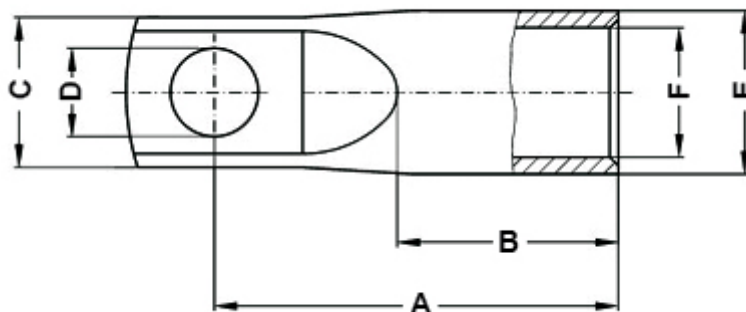

Artikel	A	B	C	D	E	F	Gewinde	Bohrung	VPE-Stckz.
17181ZG91	53,5	26,0	19,0	10,5	20,0	15,5	120 mm ²	Ø 10,0	25
17182ZG91	51,0	26,0	19,0	8,4	20,0	15,5	120 mm ²	Ø 8,0	25
17183ZG91	57,0	29,0	19,0	10,5	21,3	16,8	150 mm ²	Ø 10,0	25
17184ZG91	55,0	29,0	19,0	8,4	21,3	16,8	150 mm ²	Ø 8,0	25
17185ZG91	59,5	30,0	31,0	13,0	24,0	19,0	185 mm ²	Ø 12,0	25
17186ZG91	69,0	35,0	31,5	13,0	27,3	21,1	240 mm ²	Ø 12,0	25
17187ZG91	32,5	16,0	15,0	6,4	11,3	8,3	35 mm ²	Ø 6,0	25
17188ZG91	39,0	18,0	18,5	10,5	13,1	9,6	50 mm ²	Ø 10,0	25

Artikel	A	B	C	D	E	F	Gewinde	Bohrung	VPE-Stckz.
17189ZG91	36,0	18,0	15,0	6,4	13,1	9,6	50 mm ²	Ø 6,0	25
17190ZG91	42,5	21,0	19,0	10,5	14,7	11,3	70 mm ²	Ø 10,0	25
17191ZG91	41,0	21,0	17,0	6,4	14,7	11,3	70 mm ²	Ø 6,0	25
17192ZG91	50,0	23,0	19,0	10,5	17,5	13,5	95 mm ²	Ø 10,0	25
17193ZG91	48,0	23,0	19,0	8,4	17,5	13,5	95 mm ²	Ø 8,0	25