

SPREIZNIET MIT GRIFFSTÜCK



Technische Beschreibung


Material: PA 6

Entflammbarkeit: V2 (UL 94)

Temperaturbereich: -35°C bis +85°C

Farbe: Schwarz (Auf Anfrage auch in Farbe: Weiß lieferbar)

Alle Maße in mm

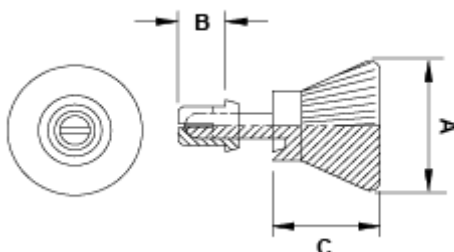

Artikel	A	B	C	Bohrung	Stärke	VPE-Stckz.
9758AA01	10,0	3,5	8,0	Ø 3,1	1,0 - 2,0	1.000
9759AA01	10,0	4,5	8,0	Ø 3,1	2,0 - 3,0	1.000
9760AA01	10,0	5,5	8,0	Ø 3,1	3,0 - 4,0	1.000
9761AA01	10,0	6,5	8,0	Ø 3,1	4,0 - 5,0	1.000
9762AA01	10,0	7,5	8,0	Ø 3,1	5,0 - 6,0	1.000
9763AA01	10,0	8,0	8,0	Ø 3,1	5,5 - 6,5	1.000
9764AA01	10,0	3,5	8,0	Ø 3,6	1,0 - 2,0	1.000
9765AA01	10,0	4,5	8,0	Ø 3,6	2,0 - 3,0	1.000

Artikel	A	B	C	Bohrung	Stärke	VPE-Stckz.
9766AA01	10,0	5,5	8,0	Ø 3,6	3,0 - 3,7	1.000
9767AA01	10,0	6,0	8,0	Ø 3,6	3,5 - 4,5	1.000
9768AA01	10,0	7,0	8,0	Ø 3,6	3,8 - 5,2	1.000
9769AA01	10,0	8,0	8,0	Ø 3,6	5,3 - 6,5	1.000
9780AA01	12,0	5,0	8,0	Ø 4,1	2,5 - 3,5	1.000
9781AA01	12,0	6,0	8,0	Ø 4,1	3,5 - 4,5	1.000
9782AA01	12,0	7,0	8,0	Ø 4,1	4,5 - 5,5	1.000
9783AA01	12,0	8,0	8,0	Ø 4,1	5,5 - 6,5	1.000
9784AA01	12,0	9,0	8,0	Ø 4,1	6,5 - 7,5	1.000
9785AA01	12,0	10,0	8,0	Ø 4,1	7,5 - 8,5	1.000