


TEILBARE KABELVERSCHRAUBUNG

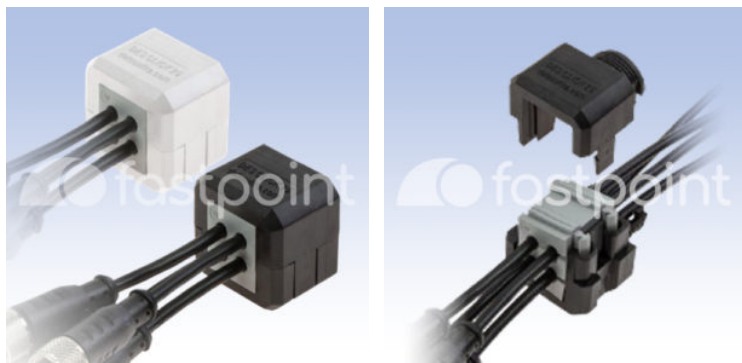

Technische Beschreibung


Material: PC

Entflammbarkeit: V0 (UL94)

Betriebstemperatur: -40° ~ +155° C

Farbe: Siehe Tabelle

Alle Maße in mm

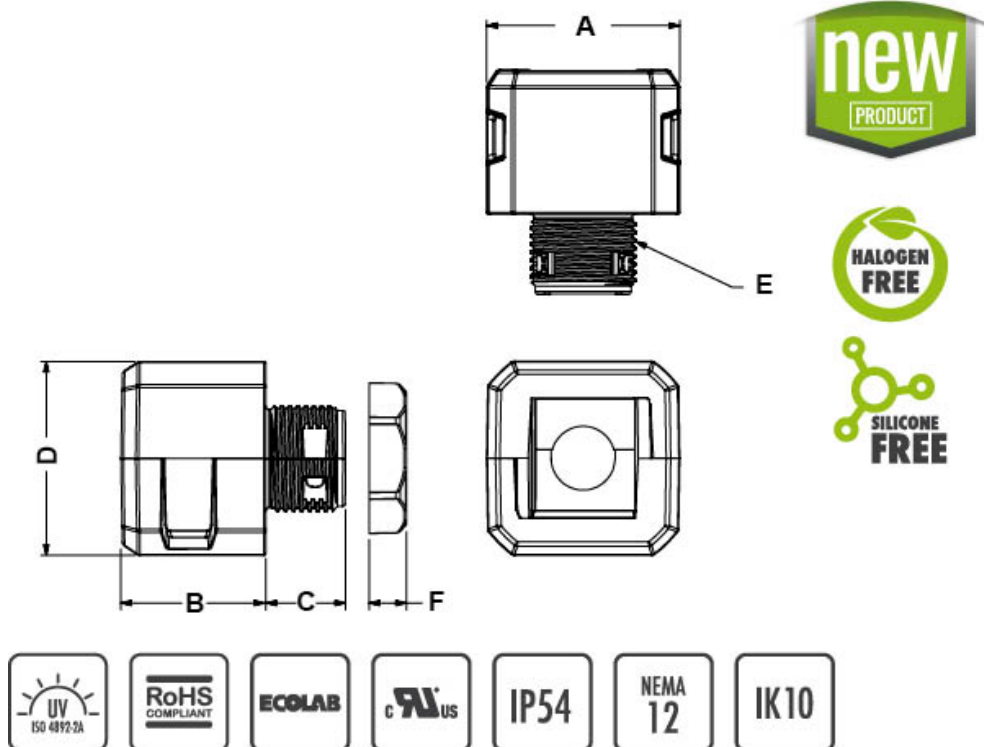

Artikel	A	B	C	D	E	F	Bohrung	Farbe	VPE-Stckz.
16443NA11	36,3	27,2	15,0	36,5	M20 x 1,5	7,0	Ø20,5	Grigio - Gray - Gau	10

Artikel	A	B	C	D	E	F	Bohrung	Farbe	VPE-Stckz.
16444NA11	36,3	27,2	15,0	36,5	M25x1,5	7,0	Ø 25,5	Grigio - Gray - Grau	10
16445NA11	36,3	27,2	15,0	36,5	M32x1,5	7,0	Ø 32,5	Grigio - Gray - Grau	10
16440NA01	36,3	27,2	15,0	36,5	M20 x 1,5	7,0	Ø20,5	Nero - Black - Schwarz	10
16441NA01	36,3	27,2	15,0	36,5	M25x1,5	7,0	Ø 25,5	Nero - Black - Schwarz	10
16442NA01	36,3	27,2	15,0	36,5	M32x1,5	7,0	Ø 32,5	Nero - Black - Schwarz	10