

□PERFECT FIX' CABLE GLANDS



Technical description

Material nut: PA 6

Material body: PA 6

Material nut: PA 6 GF30

Material ring: Polychloropren - Nitril CR/NBR

Material O-ring: NBR/PTFE

Protection grade = IP68


UL Flammability : V2 (UL94)

Working temperature: -20°C ~ +100° C

Colour: See table

Metric as per DIN EN 50262

All dimensions are in mm.

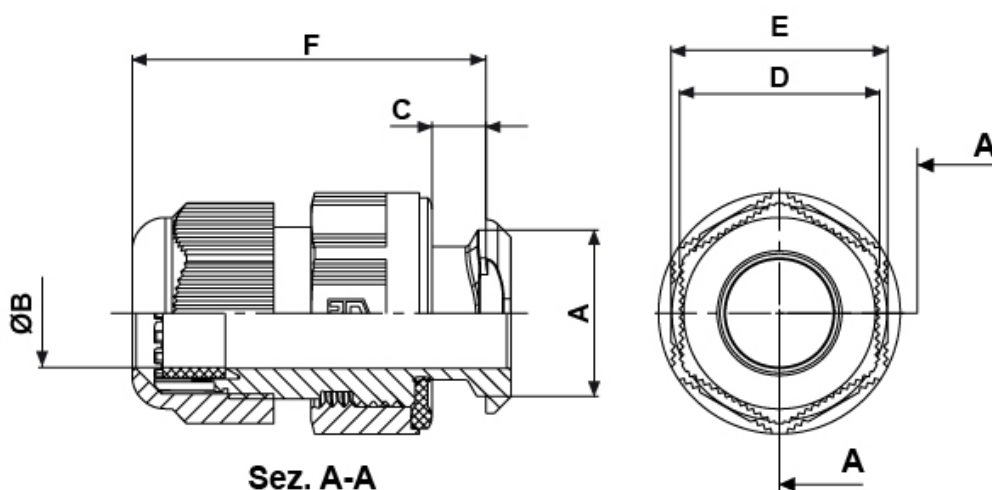

Code	A	B	C	D	E	F	Colour	Type	MOQ-Pcs
8821AA019005	16,1-16,3	5 -10	1 - 4	20,0	24,0	38,5	RAL 9005	M16	100
8821AA117001	16,1-16,3	5 -10	1 - 4	20,0	24,0	38,5	RAL 7001	M16	100

Code	A	B	C	D	E	F	Colour	Type	MOQ-Pcs
8821AA117035	16,1-16,3	5 -10	1 - 4	20,0	24,0	38,5	RAL 7035	M16	100
8822AA019005	20,1-20,4	8 - 13	1 - 4	24,0	26,0	42,5	RAL 9005	M20	100
8822AA117001	20,1-20,4	8 - 13	1 - 4	24,0	26,0	42,5	RAL 7001	M20	100
8822AA117035	20,1-20,4	8 - 13	1 - 4	24,0	26,0	42,5	RAL 7035	M20	100
8823AA019005	25,1-25,4	11 - 17	1 - 4	29,0	32,0	48,0	RAL 9005	M25	50
8823AA117001	25,1-25,4	11 - 17	1 - 4	29,0	32,0	48,0	RAL 7001	M25	50
8823AA117035	25,1-25,4	11 - 17	1 - 4	29,0	32,0	48,0	RAL 7035	M25	50
8836AA019005	32,1-32,4	15 - 21	1 - 4	36,0	42,0	58,5	RAL 9005	M32	25
8836AA117001	32,1-32,4	15 - 21	1 - 4	36,0	42,0	58,5	RAL 7001	M32	25
8836AA117035	32,1-32,4	15 - 21	1 - 4	36,0	42,0	58,5	RAL 7035	M32	25