

CONDUCTIVE SPACERS



Technical description

Material: PA 6.6

Colour: Natural



Material: Spring steel 1.4301

UL Flammability: V2 (UL94)

Operating temperature:

-35°C ~ + 85°C

All dimensions are in mm.

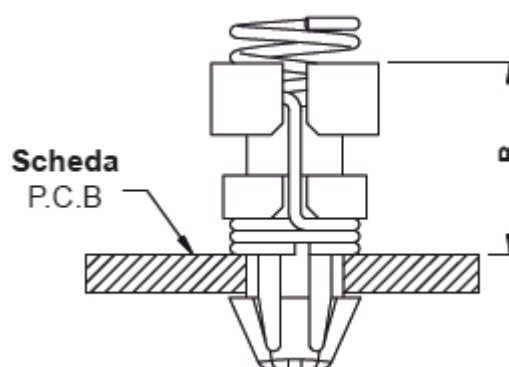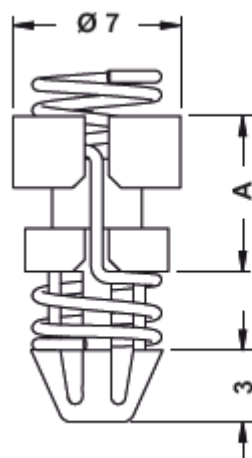

Code	A	B	C	D	Mounting hole	Thickness	MOQ-Pcs
8323AA00	6,5	8,0	Ø 7,0	3,0	Ø 4,0	0,8 - 1,6	1.000
8324AA00	7,5	9,0	Ø 7,0	3,0	Ø 4,0	0,8 - 1,6	1.000
8325AA00	8,5	10,0	Ø 7,0	3,0	Ø 4,0	0,8 - 1,6	1.000
8326AA00	10,5	12,0	Ø 7,0	3,0	Ø 4,0	0,8 - 1,6	1.000
8327AA00	12,5	14,0	Ø 7,0	3,0	Ø 4,0	0,8 - 1,6	1.000
8328AA00	14,5	16,0	Ø 7,0	3,0	Ø 4,0	0,8 - 1,6	1.000