

CROSS-SLOTTED SCREWS



Technical description


Material: PA 6.6

Colour: See table

UL Flammability: V2 (UL 94)

Operating temperature: -35°C ~ +85°C

All dimensions are in mm.

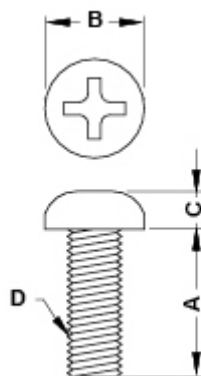

Code	A	B	C	D	Colour	MOQ-Pcs
0592AA01	20,0	12,5	2,8	M6x1	Nero - Black - Schwarz	1.000
3163AB02	15,0	12,5	2,8	M4x0,7	Bianco - White - Weiß	1.000
3165AA01	10,0	12,5	2,8	M6x1	Nero - Black - Schwarz	1.000
3167AA01	15,0	12,5	2,8	M6x1	Nero - Black - Schwarz	1.000
3168AA01	10,0	12,5	2,8	M5x0,8	Nero - Black - Schwarz	1.000
3169AA02	15,0	12,5	2,8	M5x0,8	Bianco - White - Weiß	1.000
3170AA01	20,0	12,5	2,8	M5x0,8	Nero - Black - Schwarz	1.000