

CYLINDRICAL SPACERS INT. DIAM. 2,2/ EXT. DIAM. 6,0



Technical description

Material: PA 6 , 25%GV

UL Flammability: HB (UL 94)

Colour: Black

Operating temperature: -35°C ~ +100°C

Alternative:


Material: polystyrene

UL Flammability: HB (UL 94)

Colour: White

Operating temperature: -40°C ~ +70°C

All dimensions are in mm.

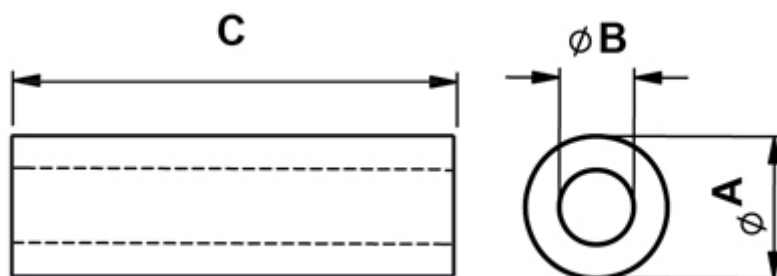

Code	A	B	C	MOQ-Pcs
10094BB0102.0	6,0	2,2	2,0	500
10094BB0103.0	6,0	2,2	3,0	500

Code	A	B	C	MOQ-Pcs
10094BB0104.0	6,0	2,2	4,0	500
10094BB0105.0	6,0	2,2	5,0	500
10094BB0106.0	6,0	2,2	6,0	500
10094BB0107.0	6,0	2,2	7,0	500
10094BB0108.0	6,0	2,2	8,0	500
10094BB0109.0	6,0	2,2	9,0	500
10094BB0110.0	6,0	2,2	10,0	500
10094BB0111.0	6,0	2,2	11,0	500
10094BB0112.0	6,0	2,2	12,0	500
10094BB0113.0	6,0	2,2	13,0	500
10094BB0114.0	6,0	2,2	14,0	500
10094BB0115.0	6,0	2,2	15,0	500
10094BB0116.0	6,0	2,2	16,0	500
10094BB0117.0	6,0	2,2	17,0	500
10094BB0118.0	6,0	2,2	18,0	500
10094BB0119.0	6,0	2,2	19,0	500
10094BB0120.0	6,0	2,2	20,0	500
10094BB0121.0	6,0	2,2	21,0	500
10094BB0122.0	6,0	2,2	22,0	500
10094BB0123.0	6,0	2,2	23,0	500
10094BB0124.0	6,0	2,2	24,0	500
10094BB0125.0	6,0	2,2	25,0	500
10094BB0126.0	6,0	2,2	26,0	500
10094BB0127.0	6,0	2,2	27,0	500
10094BB0128.0	6,0	2,2	28,0	500
10094BB0129.0	6,0	2,2	29,0	500
10094BB0130.0	6,0	2,2	30,0	500
10094BB0131.0	6,0	2,2	31,0	500
10094BB0132.0	6,0	2,2	32,0	500
10094BB0133.0	6,0	2,2	33,0	500
10094BB0134.0	6,0	2,2	34,0	500

Code	A	B	C	MOQ-Pcs
10094BB0135.0	6,0	2,2	35,0	500
10094BB0136.0	6,0	2,2	36,0	500
10094BB0137.0	6,0	2,2	37,0	500
10094BB0138.0	6,0	2,2	38,0	500
10094BB0139.0	6,0	2,2	39,0	500
10094BB0140.0	6,0	2,2	40,0	500
10094BB0141.0	6,0	2,2	41,0	500
10094BB0142.0	6,0	2,2	42,0	500
10094BB0143.0	6,0	2,2	43,0	500
10094BB0144.0	6,0	2,2	44,0	500
10094BB0145.0	6,0	2,2	45,0	500
10094BB0146.0	6,0	2,2	46,0	500
10094BB0147.0	6,0	2,2	47,0	500
10094BB0148.0	6,0	2,2	48,0	500
10094BB0149.0	6,0	2,2	49,0	500
10094BB0150.0	6,0	2,2	50,0	500