

DISTANZIATORI DA APPOGGIO



Technical description


Material: PA 6.6

Colour: natural

Flammability: V2 (UL94)

Working temperature: -35°C ~ +85°C

All dimensions are in mm

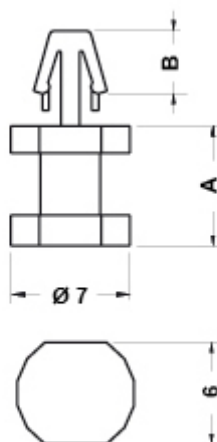

Code	A	B	C	D	Mounting hole	Thickness	MOQ-Pcs
8179AA00	4,0	3,6	Ø 7,0	6,0	Ø 3,0	1,2 - 1,7	1.000
8180AA00	5,0	3,6	Ø 7,0	6,0	Ø 3,0	1,2 - 1,7	1.000
8181AA00	7,0	4,0	Ø 7,0	6,0	Ø 3,0	1,2 - 1,7	1.000
8182AA00	8,0	3,85	Ø 7,0	6,0	Ø 3,0	1,2 - 1,7	1.000
8183AA00	9,0	4,0	Ø 7,0	6,0	Ø 3,0	1,2 - 1,7	1.000
8184AA00	11,0	3,7	Ø 7,0	6,0	Ø 3,0	1,2 - 1,7	1.000

Code	A	B	C	D	Mounting hole	Thickness	MOQ-Pcs
8185AA00	12,0	4,0	Ø 7,0	6,0	Ø 3,0	1,2 - 1,7	1.000
8186AA00	13,0	4,0	Ø 7,0	6,0	Ø 3,0	1,2 - 1,7	1.000