


DUAL LOCKING P.C.B. SPACER

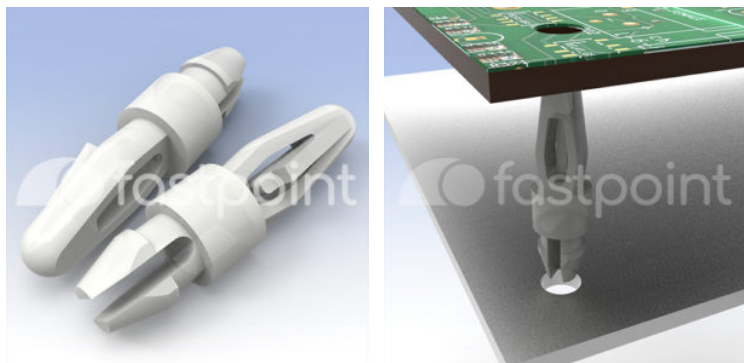

Technical description

Material: PA 6.6


Colour: Natural

Flammability: V2 (UL94)

Working temperature: -35°C ~ +130°C

All dimensions are in mm

Available in V0 (UL94) on special request

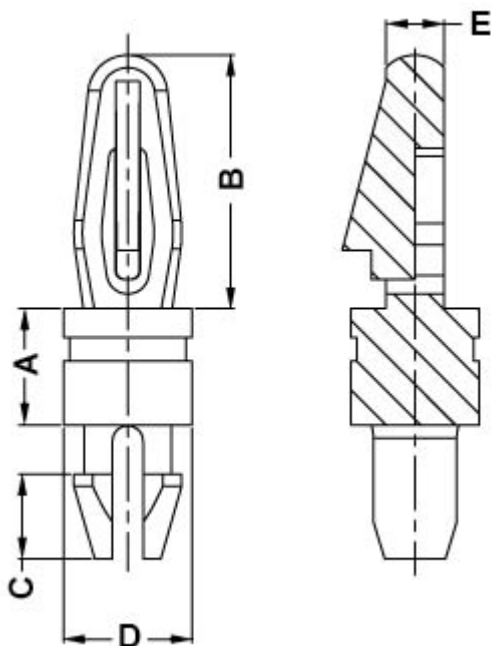

Code	A	B	C	D	E	Top Hole	Top thickness	Bottom hole	Bottom thickness	MOQ-Pcs
------	---	---	---	---	---	----------	---------------	-------------	------------------	---------

Code	A	B	C	D	E	Top Hole	Top thickness	Bottom hole	Bottom thickness	MOQ-Pcs
11300AA0003.2	3,2	8,7	2,9	Ø4,4	2,0	Ø 3,18	1,57	Ø 3,18	1,57	1.000
11300AA0004.8	4,8	8,7	2,9	Ø4,4	2,0	Ø 3,18	1,57	Ø 3,18	1,57	1.000
11300AA0006.4	6,4	8,7	2,9	Ø4,4	2,0	Ø 3,18	1,57	Ø 3,18	1,57	1.000
11300AA0007.9	7,9	8,7	2,9	Ø4,4	2,0	Ø 3,18	1,57	Ø 3,18	1,57	1.000
11300AA0009.5	9,5	8,7	2,9	Ø4,4	2,0	Ø 3,18	1,57	Ø 3,18	1,57	1.000
11300AA0011.1	11,1	8,7	2,9	Ø4,4	2,0	Ø 3,18	1,57	Ø 3,18	1,57	1.000
11300AA0012.7	12,7	8,7	2,9	Ø4,4	2,0	Ø 3,18	1,57	Ø 3,18	1,57	1.000
11300AA0014.3	14,3	8,7	2,9	Ø4,4	2,0	Ø 3,18	1,57	Ø 3,18	1,57	1.000
11300AA0015.9	15,9	8,7	2,9	Ø4,4	2,0	Ø 3,18	1,57	Ø 3,18	1,57	1.000
11300AA0019.1	19,1	8,7	2,9	Ø4,4	2,0	Ø 3,18	1,57	Ø 3,18	1,57	1.000
11300AA0022.2	22,2	8,7	2,9	Ø4,4	2,0	Ø 3,18	1,57	Ø 3,18	1,57	1.000