

## DUAL LOCKING P.C.B. SPACERS HOLE Ø 4,0/5,5 MM



### Technical description


**Material:** PA 6.6

**Colour:** Natural

**UL Flammability:** V2 (UL 94)

**Operating temperature:** -35°C ~ +85°C

All dimensions are in mm.

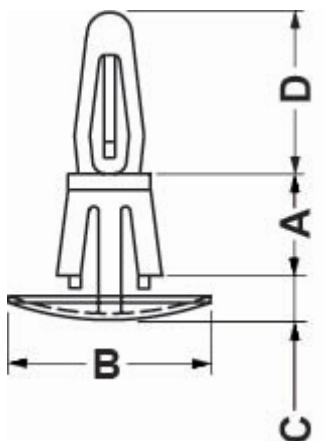

| Code     | A    | B    | C   | D    | Top Hole | Top thickness | Bottom hole | Bottom thickness | MOQ-Pcs |
|----------|------|------|-----|------|----------|---------------|-------------|------------------|---------|
| 5912AA00 | 3,5  | 10,0 | 2,2 | 10,0 | Ø 4,0    | 1,2 - 1,7     | Ø 5,5       | 0,8 - 1,6        | 1.000   |
| 5913AA00 | 6,4  | 12,7 | 2,8 | 10,0 | Ø 4,0    | 1,6           | Ø 5,4       | 1,2 - 2,0        | 1.000   |
| 5914AA00 | 6,3  | 10,0 | 1,6 | 10,0 | Ø 4,0    | 1,6           | Ø 5,5       | 1,0 - 1,7        | 1.000   |
| 5915AA00 | 7,9  | 10,0 | 2,1 | 10,0 | Ø 4,0    | 1,6           | Ø 5,5       | 1,0 - 1,7        | 1.000   |
| 5916AA00 | 10,0 | 10,0 | 1,6 | 10,0 | Ø 4,0    | 1,6           | Ø 5,5       | 1,0 - 1,7        | 1.000   |
| 5917AA00 | 12,0 | 10,0 | 1,6 | 10,0 | Ø 4,0    | 1,6           | Ø 5,5       | 1,0 - 1,7        | 1.000   |
| 5918AA00 | 12,7 | 10,0 | 1,6 | 10,0 | Ø 4,0    | 1,6           | Ø 5,5       | 1,0 - 1,7        | 1.000   |