


EXPANDABLE BRAIDED SLEEVING 150°C UL

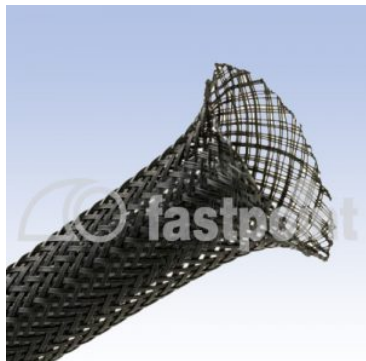

Technical description

Material:

Polyester (PET)

Self-extinguishing:

UL 224 VW-1

Operating temperature:

-50° C ~ 150° C

Intermittent 220° C

Tensile Strenght: 100,000 PSI

Colour: Black and grey

Halogen free

All dimensions are in mm

Code	Colour	Nominal diameter	Minimal diameter	Maximal diameter	PKG.MT
18385PT01	Nero / Black / Schwarz	3,0	1,0	5,0	200
18385PT11	Grigio / Gray / Grau	3,0	1,0	5,0	200
18386PT01	Nero / Black / Schwarz	4,0	2,0	7,0	200
18386PT11	Grigio / Gray / Grau	4,0	2,0	7,0	200
18387PT01	Nero / Black / Schwarz	5,0	3,0	8,0	100
18387PT11	Grigio / Gray / Grau	5,0	3,0	8,0	100
18388PT01	Nero / Black / Schwarz	6,0	3,0	9,0	200

Code	Colour	Nominal diameter	Minimal diameter	Maximal diameter	PKG.MT
18388PT11	Grigio / Gray / Grau	6,0	3,0	9,0	200
18389PT01	Nero / Black / Schwarz	8,0	5,0	12,0	100
18389PT11	Grigio / Gray / Grau	8,0	5,0	12,0	100
18390PT01	Nero / Black / Schwarz	10,0	7,0	15,0	100
18390PT11	Grigio / Gray / Grau	10,0	7,0	15,0	100
18391PT01	Nero / Black / Schwarz	12,0	6,0	20,0	100
18392PT01	Nero / Black / Schwarz	15,0	8,0	23,0	100
18392PT11	Grigio / Gray / Grau	15,0	8,0	23,0	100
18393PT01	Nero / Black / Schwarz	20,0	12,0	30,0	100
18393PT11	Grigio / Gray / Grau	20,0	12,0	30,0	100
18394PT01	Nero / Black / Schwarz	25,0	18,0	34,0	50
18394PT11	Grigio / Gray / Grau	25,0	18,0	34,0	50
18395PT01	Nero / Black / Schwarz	30,0	20,0	40,0	50
18395PT11	Grigio / Gray / Grau	30,0	20,0	40,0	50
18396PT01	Nero / Black / Schwarz	40,0	25,0	60,0	50
18396PT11	Grigio / Gray / Grau	40,0	25,0	60,0	50
18397PT01	Nero / Black / Schwarz	50,0	45,0	75,0	25
18397PT11	Grigio / Gray / Grau	50,0	45,0	75,0	25