


EXPANDABLE BRAIDED SLEEVING

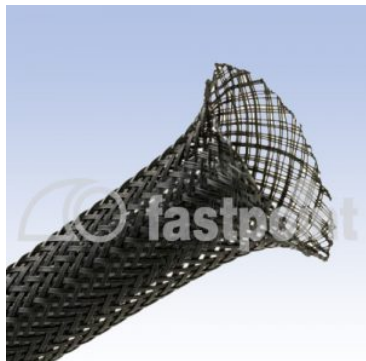

Technical description

Material:

Polyester (PET)

Self-extinguishing:

UL 224 VW-1

Operating temperature:

-50° C ~ 150° C

Intermittent 220° C

Tensile Strenght: 100,000 PSI

Colour: Black and grey

Halogen free

All dimensions are in mm

Code	Colour	Nominal diameter	Minimal diameter	Maximal diameter	PKG.MT
8053PT01	Nero / Black / Schwarz	3,0	1,0	5,0	200
8053PT11	Grigio / Gray / Grau	3,0	1,0	5,0	200
8054PT01	Nero / Black / Schwarz	4,0	2,0	7,0	200
8054PT11	Grigio / Gray / Grau	4,0	2,0	7,0	200
8055PT01	Nero / Black / Schwarz	5,0	3,0	8,0	100
8055PT11	Grigio / Gray / Grau	5,0	3,0	8,0	100
8051PT01	Nero / Black / Schwarz	6,0	3,0	9,0	200

Code	Colour	Nominal diameter	Minimal diameter	Maximal diameter	PKG.MT
8051PT11	Grigio / Gray / Grau	6,0	3,0	9,0	200
8056PT01	Nero / Black / Schwarz	8,0	5,0	12,0	100
8056PT11	Grigio / Gray / Grau	8,0	5,0	12,0	100
8060PT01	Nero / Black / Schwarz	10,0	7,0	15,0	100
8060PT11	Grigio / Gray / Grau	10,0	7,0	15,0	100
8061PT11	Grigio / Gray / Grau	12,0	6,0	20,0	100
8061PT01	Nero / Black / Schwarz	12,0	6,0	20,0	100
8062PT01	Nero / Black / Schwarz	15,0	8,0	23,0	100
8062PT11	Grigio / Gray / Grau	15,0	8,0	23,0	100
8063PT01	Nero / Black / Schwarz	20,0	12,0	30,0	100
8063PT11	Grigio / Gray / Grau	20,0	12,0	30,0	100
8065PT01	Nero / Black / Schwarz	25,0	18,0	34,0	50
8065PT11	Grigio / Gray / Grau	25,0	18,0	34,0	50
8066PT01	Nero / Black / Schwarz	30,0	20,0	40,0	50
8066PT11	Grigio / Gray / Grau	30,0	20,0	40,0	50
8067PT01	Nero / Black / Schwarz	40,0	25,0	60,0	50
8067PT11	Grigio / Gray / Grau	40,0	25,0	60,0	50
8070PT01	Nero / Black / Schwarz	50,0	45,0	75,0	25
8070PT11	Grigio / Gray / Grau	50,0	45,0	75,0	25