

HOSE CLAMP L WORM DRIVE CLIP W1



Technical description


Material screw: Mild Steel

Finish: silver - white zinc - plated

Material band and housing: galvanized steel

A = cable or tube diameter

All dimensions are in mm

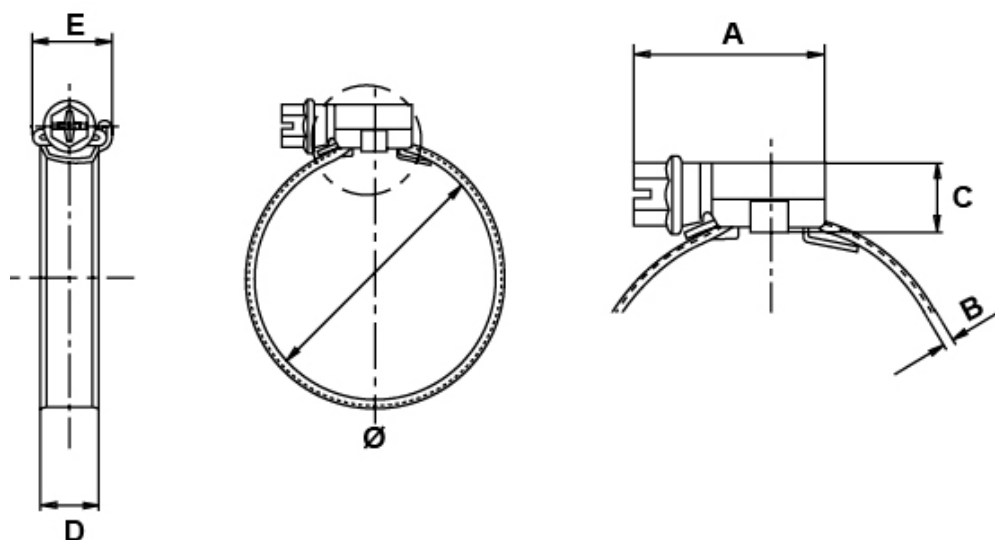

Code	A	B	C	D	E	Ø Diametro (mm)	Values Torque (Nm)	Valore Max Pressione (Bar)	MOQ-Pcs
20700MC94	17,5 (max)	0,65 (+0,10)	8,4 (max)	7 (+0,3)	10,9 (max)	8-12	1,5	30,0	200
20701MC94	22,1 (max)	0,65 (+0,10)	10,5 (max)	9 (+0,3)	14,0 (max)	8-16	3,0	45,0	200
20702MC94	22,1 (max)	0,65 (+0,10)	10,5 (max)	9 (+0,3)	14,0 (max)	12-22	3,0	45,0	200

Code	A	B	C	D	E	Ø Diametro (mm)	Values Torque (Nm)	Valore Max Pressione (Bar)	MOQ-Pcs
20703MC94	23,6 (max)	0,75 (+0,10)	10,5 (max)	9 (+0,3)	14,0 (max)	16-27	3,5	42,0	200
20704MC94	23,6 (max)	0,75 (+0,10)	10,5 (max)	9 (+0,3)	14,0 (max)	20-32	3,5	36,0	200
20705MC94	25,6 (max)	0,75 (+0,10)	10,5 (max)	9 (+0,3)	14,0 (max)	25-40	4,0	32,0	100
20706MC94	25,6 (max)	0,75 (+0,10)	10,5 (max)	9 (+0,3)	14,0 (max)	30-45	4,0	28,0	100
20707MC94	25,6 (max)	0,75 (+0,10)	10,5 (max)	9 (+0,3)	14,0 (max)	32-50	4,0	24,0	100
20708MC94	25,6 (max)	0,75 (+0,10)	10,5 (max)	9 (+0,3)	14,0 (max)	40-60	4,0	19,0	100
20709MC94	29,6 (max)	0,75 (+0,10)	10,5 (max)	9 (+0,3)	14,0 (max)	50-70	4,0	17,0	100
20710MC94	29,6 (max)	0,75 (+0,10)	10,5 (max)	9 (+0,3)	14,0 (max)	60-80	4,0	15,0	100
20711MC94	29,6 (max)	0,75 (+0,10)	10,5 (max)	9 (+0,3)	14,0 (max)	70-90	4,0	13,0	50
20712MC94	29,6 (max)	0,75 (+0,10)	10,5 (max)	9 (+0,3)	14,0 (max)	80-100	4,0	11,0	50
20713MC94	29,6 (max)	0,75 (+0,10)	10,5 (max)	9 (+0,3)	14,0 (max)	90-110	4,0	10,0	25
20714MC94	29,6 (max)	0,75 (+0,10)	10,5 (max)	9 (+0,3)	14,0 (max)	100-120	4,0	9,0	25
20715MC94	29,6 (max)	0,75 (+0,10)	10,5 (max)	9 (+0,3)	14,0 (max)	110-130	4,0	8,0	25
20716MC94	29,6 (max)	0,75 (+0,10)	10,5 (max)	9 (+0,3)	14,0 (max)	120-140	4,0	7,0	25
20717MC94	29,6 (max)	0,75 (+0,10)	10,5 (max)	9 (+0,3)	14,0 (max)	130-150	4,0	6,0	25
20718MC94	29,6 (max)	0,75 (+0,10)	10,5 (max)	9 (+0,3)	14,0 (max)	140-160	4,0	5,0	25