

INSULATOR SPACER M/M M3 E M4 POLYSTIROL/STEEL



Technical description

Material: Polystyrol

Thread insert: Steel zinc plated


Colour: grey

UL flammability: HB (UL 94)

Working temperature: -15°C ~ + 90°C

Dielectric strength: 50kV

All dimension are in mm.

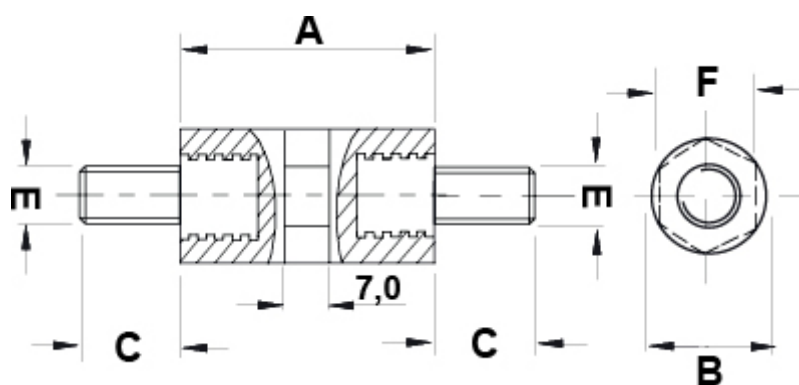

| Code | A | B | C | D | E | F | Type | MOQ-Pcs |
|---------------|------|------|-----|---|----|-----|------|---------|
| 10482DA1115.0 | 15,0 | 7,0 | 7,0 | - | M3 | 6,0 | 2 | 100 |
| 10482DA1120.0 | 20,0 | 7,0 | 7,0 | - | M3 | 6,0 | 2 | 100 |
| 10482DA1125.0 | 25,0 | 7,0 | 7,0 | - | M3 | 6,0 | 2 | 100 |
| 10482DA1130.0 | 30,0 | 7,0 | 7,0 | - | M3 | 6,0 | 2 | 100 |
| 10482DA1140.0 | 40,0 | 7,0 | 7,0 | - | M3 | 6,0 | 2 | 100 |
| 10485DA1115.0 | 15,0 | 10,0 | 7,0 | - | M4 | 9,0 | 2 | 100 |

| Code | A | B | C | D | E | F | Type | MOQ-Pcs |
|---------------|------|------|-----|---|----|-----|------|---------|
| 10485DA1120.0 | 20,0 | 10,0 | 7,0 | - | M4 | 9,0 | 2 | 100 |
| 10485DA1125.0 | 25,0 | 10,0 | 7,0 | - | M4 | 9,0 | 2 | 100 |
| 10485DA1130.0 | 30,0 | 10,0 | 7,0 | - | M4 | 9,0 | 2 | 100 |
| 10485DA1140.0 | 40,0 | 10,0 | 7,0 | - | M4 | 9,0 | 2 | 100 |
| 10485DA1150.0 | 50,0 | 10,0 | 7,0 | - | M4 | 9,0 | 2 | 100 |