

INSULATOR SPACER M/M POLYAMIDE/BRASS



Technical description

Material: PA 6.6

Threaded insert: Brass nikel plated


Colour: Natural

UL flammability: HB (UL 94)

Working temperature: -25°C ~ + 85°C

Dielectric strength: 50kV

All dimension are in mm.

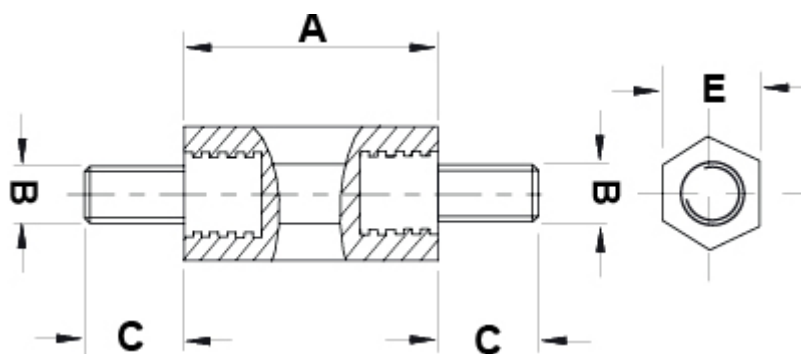

Code	A	B	C	D	Colour	MOQ-Pcs
10499AA0215.0	15,0	M2.5	6,0	6,0	Bianco	100
10499AA0218.0	18,0	M2.5	6,0	6,0	Bianco	100
10499AA0220.0	20,0	M2.5	6,0	6,0	Bianco	100
10499AA0225.0	25,0	M2.5	6,0	6,0	Bianco	100
10499AA0230.0	30,0	M2.5	6,0	6,0	Bianco	100
10499AA0235.0	35,0	M2.5	6,0	6,0	Bianco	100

Code	A	B	C	D	Colour	MOQ-Pcs
10499AA0240.0	40,0	M2.5	6,0	6,0	Bianco	100
10500AA0215.0	15,0	M3	6,0	6,0	Bianco	100
10500AA0218.0	18,0	M3	6,0	6,0	Bianco	100
10500AA0220.0	20,0	M3	6,0	6,0	Bianco	100
10500AA0225.0	25,0	M3	6,0	6,0	Bianco	100
10500AA0230.0	30,0	M3	6,0	6,0	Bianco	100
10500AA0235.0	35,0	M3	6,0	6,0	Bianco	100
10500AA0240.0	40,0	M3	6,0	6,0	Bianco	100
10501AA0215.0	15,0	M4	8,0	8,0	Bianco	100
10501AA0218.0	18,0	M4	8,0	8,0	Bianco	100
10501AA0220.0	20,0	M4	8,0	8,0	Bianco	100
10501AA0225.0	25,0	M4	8,0	8,0	Bianco	100
10501AA0230.0	30,0	M4	8,0	8,0	Bianco	100
10501AA0235.0	35,0	M4	8,0	8,0	Bianco	100
10501AA0240.0	40,0	M4	8,0	8,0	Bianco	100
10502AA0215.0	15,0	M5	10,0	10,0	Bianco	100
10502AA0218.0	18,0	M5	10,0	10,0	Bianco	100
10502AA0220.0	20,0	M5	10,0	10,0	Bianco	100
10502AA0225.0	25,0	M5	10,0	10,0	Bianco	100
10502AA0230.0	30,0	M5	10,0	10,0	Bianco	100
10502AA0235.0	35,0	M5	10,0	10,0	Bianco	100
10502AA0240.0	40,0	M5	10,0	10,0	Bianco	100
10503AA0025.0	25,0	M6	12,0	13,0	Naturale	100
10503AA0030.0	30,0	M6	12,0	13,0	Naturale	100
10503AA0035.0	35,0	M6	12,0	13,0	Naturale	100
10503AA0040.0	40,0	M6	12,0	13,0	Naturale	100
10503AA0045.0	45,0	M6	12,0	13,0	Naturale	100
10503AA0050.0	50,0	M6	12,0	13,0	Naturale	100
10504AA0025.0	25,0	M8	14,0	15,0	Naturale	100
10504AA0030.0	30,0	M8	14,0	15,0	Naturale	100
10504AA0035.0	35,0	M8	14,0	15,0	Naturale	100

Code	A	B	C	D	Colour	MOQ-Pcs
10504AA0040.0	40,0	M8	14,0	15,0	Naturale	100
10504AA0045.0	45,0	M8	14,0	15,0	Naturale	100
10504AA0050.0	50,0	M8	14,0	15,0	Naturale	100