

KNURLED SCREWS WITH SLIT



Technical description


Material: PA 6.6 , 25%GV

Colour: Black

UL Flammability: HB (UL 94)

Operating temperature: -40°C ~ +85°C

All dimensions are in mm.

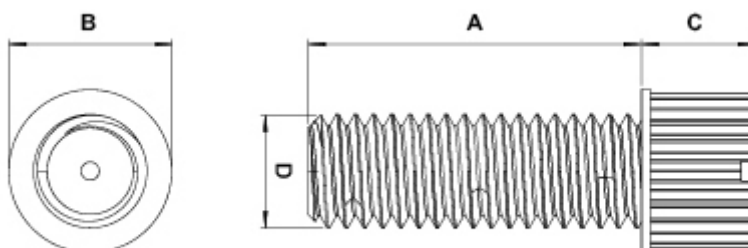

Code	A	B	C	D	MOQ-Pcs
0568BB01	6,0	7,0	5,0	M 4x0,7	1.000
0569AB01	10,0	7,0	5,0	M 4x0,7	1.000
0570BB01	15,0	7,0	5,0	M 4x0,7	1.000
0571BB01	20,0	7,0	5,0	M 4x0,7	1.000
0579BB01	10,0	7,0	5,0	M 5x0,8	1.000