

MARKER TIES



Technical description


Material: PA 6.6

Colour: Natural

UL Flammability: V2 (UL94)

Operating temperature: -35°C ~ +85°C

All dimensions are in mm.

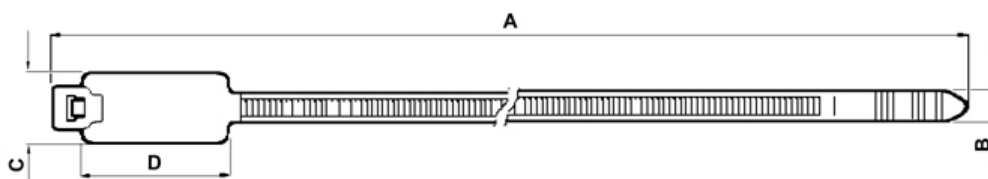

Code	A	B	C	D	Max cable	Min. loop tensile strenght (kg)	MOQ-Pcs
2506AA00	190,0	4,8	13,0	28,5	48,0	22,2	1.000
2507AA00	270,0	4,8	13,0	28,5	68,0	22,2	1.000