

METRIC M3 SPACERS WITH SNAP-LOCK HOLE Ø 4,0



Technical description


Material: PA 6.6

Colour: Black

UL Flammability: HB (UL 94)

Operating temperature: $-35^{\circ}C \sim +130^{\circ}C$

All dimensions are in mm.

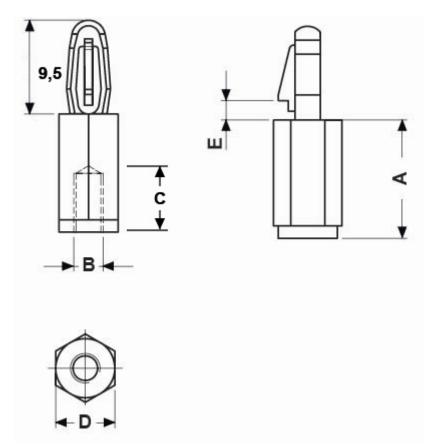

1



FASTPOINT SRL | Via Industria 27, Camponogara (VE) T +39 041 462435 | F +39 041 463903 P IVA 01746590288 | Email: info@fastpointweb.it

Code	Α	В	С	D	E	Mounting hole	Thickness	MOQ-Pcs
8163AA0105.0	5,0	М3	3,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0106.0	6,0	М3	4,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0107.0	7,0	М3	5,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0108.0	8,0	М3	6,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0109.0	9,0	М3	7,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0110.0	10,0	М3	8,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0111.0	11,0	М3	9,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0112.0	12,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0113.0	13,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0114.0	14,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0115.0	15,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0116.0	16,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0117.0	17,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0118.0	18,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0119.0	19,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0120.0	20,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0121.0	21,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0122.0	22,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0123.0	23,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0124.0	24,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0125.0	25,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0126.0	26,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0127.0	27,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0128.0	28,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0129.0	29,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0130.0	30,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0131.0	31,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0132.0	32,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0133.0	33,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0134.0	34,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0135.0	35,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000

Fastpoint srl - Tutte le informazioni e i dati sono indicativi e possono essere soggetti a variazioni senza preavviso. Metric M3 spacers with snap-lock hole Ø 4,0 | 2



FASTPOINT SRL | Via Industria 27, Camponogara (VE) T +39 041 462435 | F +39 041 463903 P IVA 01746590288 | Email: info@fastpointweb.it

Code	A	В	С	D	E	Mounting hole	Thickness	MOQ-Pcs
8163AA0136.0	36,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0137.0	37,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0138.0	38,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0139.0	39,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0140.0	40,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0141.0	41,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0142.0	42,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0143.0	43,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0144.0	44,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0145.0	45,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0146.0	46,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0147.0	47,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0148.0	48,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0149.0	49,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0150.0	50,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0151.0	51,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0152.0	52,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0153.0	53,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0154.0	54,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0155.0	55,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0156.0	56,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0157.0	57,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0158.0	58,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0159.0	59,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0160.0	60,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000
8163AA0161.0	61,0	М3	10,0	6,0	2,5	Ø 4,0	2,5	1.000