


METRIC M3 THREADED P.C.B. SPACERS

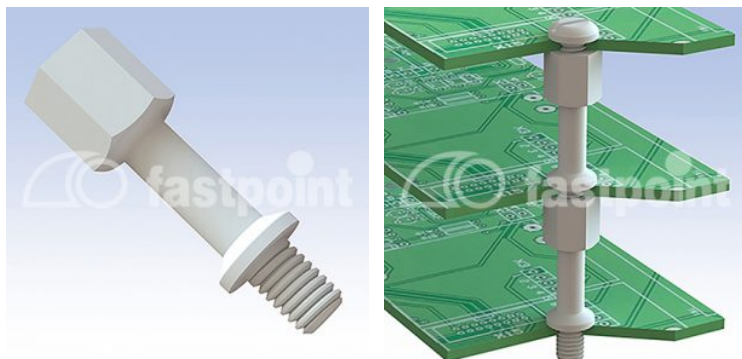

Technical description


Material: PA 6.6 25% CV

Colour: Natural

UL Flammability: V2 (UL 94)

Working temperature: -35°C ~ +85°C

All dimensions are in mm.

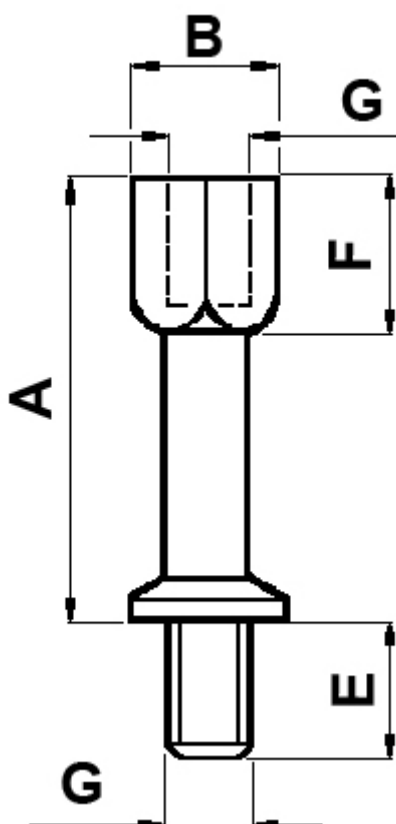

Code	A	B	E	F	G	MOQ-Pcs
1235BB00	10,0	7,0	6,0	6,5	M4x0,7	1.000

Code	A	B	E	F	G	MOQ-Pcs
1236BB00	15,0	7,0	6,0	6,5	M4x0,7	1.000
1237BB00	20,0	7,0	6,0	6,5	M4x0,7	1.000
1238BB00	25,0	7,0	6,0	6,5	M4x0,7	1.000
1239BB00	30,0	7,0	6,0	6,5	M4x0,7	1.000
3060BB00	10,0	5,5	5,0	6,7	M3x0,5	1.000
3061BB00	15,0	5,5	5,0	6,7	M3x0,5	1.000
3062BB00	20,0	5,5	5,0	6,7	M3x0,5	1.000
3063BB00	25,0	5,5	5,0	6,7	M3x0,5	1.000
3064BB00	30,0	5,5	5,0	6,7	M3x0,5	1.000