

MINI DUAL LOCKING SUPPORTS



Technical description

Material: PA 6.6


Colour: Natural

UL Flammability: V2 (UL 94)

Operating temperature: -35°C ~ +85°C

Special request only: PA6.6 - UL 94 V0

All dimensions are in mm.

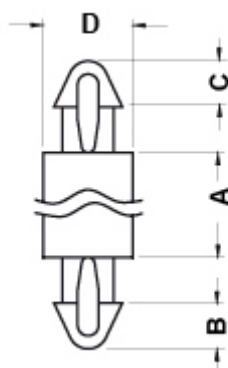

Code	A	B	C	D	Top Hole	Top thickness	Bottom hole	Bottom thickness	MOQ-Pcs
13131AA00	1,6	1,9	1,9	3,5	Ø 2,0	1,6	Ø 2,0	1,6	2.000
8437AA00	2,2	1,9	1,9	3,5	Ø 2,0	1,6	Ø 2,0	1,6	2.000
8438AA00	3,0	1,9	1,9	3,5	Ø 2,0	1,6	Ø 2,0	1,6	2.000
8439AA00	4,0	1,9	1,9	3,5	Ø 2,0	1,6	Ø 2,0	1,6	2.000
8440AA00	5,0	1,9	1,9	3,5	Ø 2,0	1,6	Ø 2,0	1,6	2.000
8441AA00	6,0	1,9	1,9	3,5	Ø 2,0	1,6	Ø 2,0	1,6	2.000

Code	A	B	C	D	Top Hole	Top thickness	Bottom hole	Bottom thickness	MOQ-Pcs
8442AA00	8,0	1,9	1,9	3,5	Ø 2,0	1,6	Ø 2,0	1,6	2.000
8443AA00	10,0	1,9	1,9	3,5	Ø 2,0	1,6	Ø 2,0	1,6	2.000
8444AA00	14,0	1,9	1,9	3,5	Ø 2,0	1,6	Ø 2,0	1,6	2.000