

## OPEN ANCHOR WIRE AND PIPE CLIPS



### Technical description

Material: PA 6.6

Colour: natural


8086AA01: available only in black

Flammability: V2 (UL 94)



Working temperature -35°C ~ +85°C

All dimensions are in mm.


TYPE 1

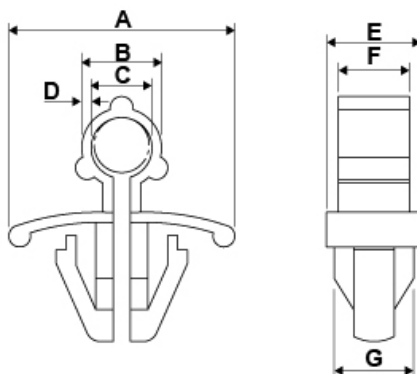

TYPE 2

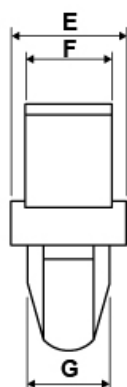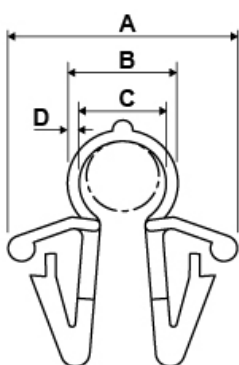

TYPE 3

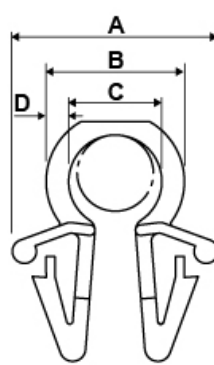

| Code     | A    | B    | C    | D    | E    | F   | G   | Mounting hole | Thickness | Chiuso | Type | MOQ-Pcs |
|----------|------|------|------|------|------|-----|-----|---------------|-----------|--------|------|---------|
| 8079AA00 | 13,5 | 6,5  | 5,2  | 0,7  | 6,9  | 5,2 | 4,9 | Ø 6,0         | 2,0       | Ø 4,5  | 2    | 1.000   |
| 8081AA00 | 13,6 | 9,2  | 6,3  | 1,55 | 6,9  | 5,9 | 4,9 | Ø 6,0         | 2,0       | Ø 5,0  | 3    | 1.000   |
| 8083AA00 | 13,2 | 10,9 | 8,1  | 1,5  | 6,9  | 5,9 | 4,9 | Ø 6,0         | 2,0       | Ø 7,0  | 3    | 1.000   |
| 8084AA00 | 13,4 | 12,8 | 9,85 | 1,35 | 6,9  | 5,9 | 4,9 | Ø 6,0         | 2,0       | Ø 9,0  | 3    | 1.000   |
| 8085AA00 | 15,3 | 5,5  | 4,2  | 0,65 | 6,55 | 4,9 | 5,5 | Ø 6,5         | 1,2       | Ø 3,8  | 1    | 1.000   |
| 8086AA01 | 12,2 | 7,1  | 5,5  | 0,75 | 6,5  | 5,0 | 5,3 | Ø 6,5         | 2,0       | Ø 5,0  | 2    | 1.000   |