

PAN HEAD SCREW WITH SLIT DIN EN ISO 1207 (EX DIN 84)



Technical description

Material: PA 6

Colour : Natural

Estimate according:


DIN EN ISO 1207 (EX DIN 84)

Operating temperature:

-30° C ~ + max. 100° C

All dimensions are in mm.

Intermediated thread lengths upon request

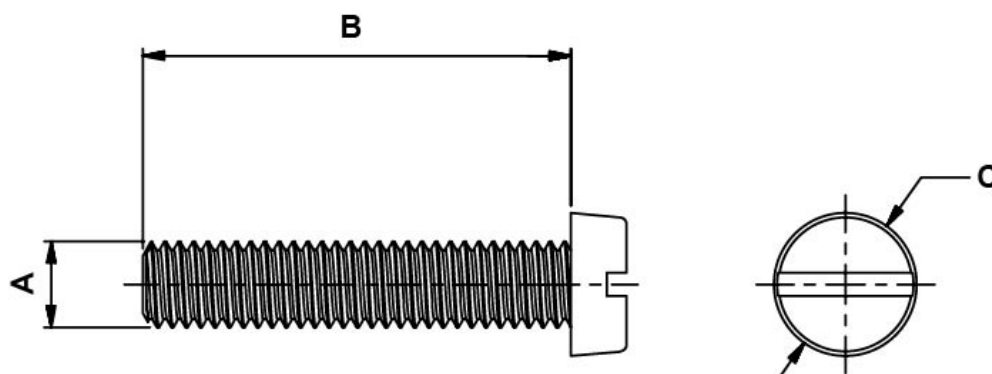

Code	A	B	C	MOQ-Pcs
18176AA0025.0	M 2	25,0	3,8	1.000
18176AA0020.0	M 2	20,0	3,8	1.000
18176AA0016.0	M 2	16,0	3,8	1.000
18176AA0012.0	M 2	12,0	3,8	1.000
18176AA0010.0	M 2	10,0	3,8	1.000
18176AA0008.0	M 2	8,0	3,8	1.000
18176AA0006.0	M 2	6,0	3,8	1.000
18176AA0005.0	M 2	5,0	3,8	1.000

Code	A	B	C	MOQ-Pcs
18176AA0004.0	M 2	4,0	3,8	1.000
18177AA0008.0	M 2,5	8,0	4,5	1.000
18177AA0004.0	M 2.5	4,0	4,5	1.000
18177AA0005.0	M 2,5	5,0	4,5	1.000
18177AA0006.0	M 2,5	6,0	4,5	1.000
18177AA0004.5	M 2,5	4,5	4,5	1.000
18177AA0025.0	M 2,5	25,0	4,5	1.000
18177AA0010.0	M 2,5	10,0	4,5	1.000
18177AA0012.0	M 2,5	12,0	4,5	1.000
18177AA0016.0	M 2,5	16,0	4,5	1.000
18177AA0020.0	M 2,5	20,0	4,5	1.000
10302AA0006.0	M 3	6,0	5,5	1.000
10302AA0004.0	M 3	4,0	5,5	1.000
10302AA0005.0	M 3	5,0	5,5	1.000
10302AA0008.0	M 3	8,0	5,5	1.000
10302AA0025.0	M 3	25,0	5,5	1.000
10302AA0010.0	M 3	10,0	5,5	1.000
10302AA0012.0	M 3	12,0	5,5	1.000
10302AA0014.0	M 3	14,0	5,5	1.000
10302AA0016.0	M 3	16,0	5,5	1.000
10302AA0018.0	M 3	18,0	5,5	1.000
10302AA0020.0	M 3	20,0	5,5	1.000
10302AA0022.0	M 3	22,0	5,5	1.000
10302AA0028.0	M 3	28,0	5,5	1.000
10302AA0030.0	M 3	30,0	5,5	1.000
10303AA0016.0	M 4	16,0	7,0	1.000
10303AA0004.0	M 4	4,0	7,0	1.000
10303AA0005.0	M 4	5,0	7,0	1.000
10303AA0022.0	M 4	22,0	7,0	1.000
10303AA0006.0	M 4	6,0	7,0	1.000
10303AA0008.0	M 4	8,0	7,0	1.000

Code	A	B	C	MOQ-Pcs
10303AA0018.0	M 4	18,0	7,0	1.000
10303AA0010.0	M 4	10,0	7,0	1.000
10303AA0012.0	M 4	12,0	7,0	1.000
10303AA0020.0	M 4	20,0	7,0	1.000
10303AA0014.0	M 4	14,0	7,0	1.000
10303AA0025.0	M 4	25,0	7,0	1.000
10303AA0028.0	M 4	28,0	7,0	1.000
10303AA0030.0	M 4	30,0	7,0	1.000
10304AA0025.0	M 5	25,0	8,5	1.000
10304AA0016.0	M 5	16,0	8,5	1.000
10304AA0004.0	M 5	4,0	8,5	1.000
10304AA0006.0	M 5	6,0	8,5	1.000
10304AA0008.0	M 5	8,0	8,5	1.000
10304AA0010.0	M 5	10,0	8,5	1.000
10304AA0012.0	M 5	12,0	8,5	1.000
10304AA0035.0	M 5	35,0	8,5	1.000
10304AA0030.0	M 5	30,0	8,5	1.000
10304AA0014.0	M 5	14,0	8,5	1.000
10304AA0020.0	M 5	20,0	8,5	1.000
10305AA0016.0	M 6	16,0	10,0	1.000
10305AA0015.0	M 6	15,0	10,0	1.000
10305AA0005.0	M 6	5,0	10,0	1.000
10305AA0006.0	M 6	6,0	10,0	1.000
10305AA0008.0	M 6	8,0	10,0	1.000
10305AA0010.0	M 6	10,0	10,0	1.000
10305AA0012.0	M 6	12,0	10,0	1.000
10305AA0035.0	M 6	35,0	10,0	1.000
10305AA0030.0	M 6	30,0	10,0	1.000
10305AA0025.0	M 6	25,0	10,0	1.000
10305AA0020.0	M 6	20,0	10,0	1.000
10306AA0008.0	M 8	8,0	13,0	1.000

Code	A	B	C	MOQ-Pcs
10306AA0016.0	M 8	16,0	13,0	1.000
10306AA0035.0	M 8	35,0	13,0	1.000
10306AA0004.0	M 8	4,0	13,0	1.000
10306AA0005.0	M 8	5,0	13,0	1.000
10306AA0006.0	M 8	6,0	13,0	1.000
10306AA0010.0	M 8	10,0	13,0	1.000
10306AA0012.0	M 8	12,0	13,0	1.000
10306AA0015.0	M 8	15,0	13,0	1.000
10306AA0018.0	M 8	18,0	13,0	1.000
10306AA0020.0	M 8	20,0	13,0	1.000
10306AA0023.0	M 8	23,0	13,0	1.000
10306AA0025.0	M 8	25,0	13,0	1.000
10306AA0030.0	M 8	30,0	13,0	1.000
10307AA0006.0	M10	6,0	16,0	1.000
10307AA0020.0	M10	20,0	16,0	1.000
10307AA0010.0	M10	10,0	16,0	1.000
10307AA0008.0	M10	8,0	16,0	1.000
10307AA0012.0	M10	12,0	16,0	1.000
10307AA0023.0	M10	23,0	16,0	1.000
10307AA0014.0	M10	14,0	16,0	1.000
10307AA0025.0	M10	25,0	16,0	1.000
10307AA0030.0	M10	30,0	16,0	1.000
10307AA0035.0	M10	35,0	16,0	1.000
10307AA0004.0	M10	4,0	16,0	1.000
10307AA0016.0	M10	16,0	16,0	1.000
10308AA0030.0	M12	30,0	16,0	1.000
10308AA0025.0	M12	25,0	16,0	1.000
10308AA0035.0	M12	35,0	16,0	1.000
10308AA0015.0	M12	15,0	16,0	1.000
10308AA0012.0	M12	12,0	16,0	1.000
10308AA0010.0	M12	10,0	16,0	1.000

Code	A	B	C	MOQ-Pcs
10308AA0009.0	M12	9,0	16,0	1.000
10308AA0040.0	M12	40,0	16,0	1.000
10308AA0045.0	M12	45,0	16,0	1.000
10308AA0020.0	M12	20,0	16,0	1.000